




■Features

- Miniature size
- Built-in exclusive IC
- Wide half angle & long reception distance
- Good noise-proof capability
- High immunity against ambient light

■Applications

- AV instruments (Audio, TV, VCR, CD player)
- Home appliances (Air-conditioner, Fan, Light.)
- Remote control for wireless devices

■Outline Dimension

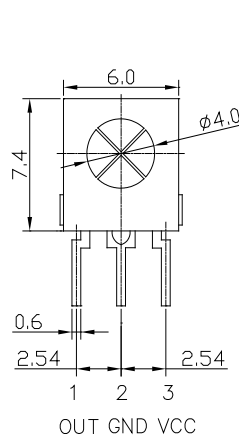

1. OUT
2. GND
3. VCC

Unit: mm

Tolerances: ± 0.30 mm
unless otherwise noted


■Absolute Maximum Rating

($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V_{cc}	6.0	V
Operating Temperature	T_{opr}	$-10 \sim +60$	$^\circ\text{C}$
Storage Temperature	T_{stg}	$-20 \sim +75$	$^\circ\text{C}$
Lead Soldering Temperature *1	T_{sol}	260°C	-

*1 At the position of 2mm from the bottom of the package within 5 seconds

■Directivity

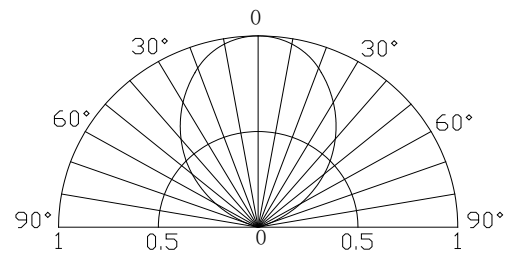

■Electrical -Optical Characteristics


($T_a = 25^\circ\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply Voltage	V_{cc}	-	2.7	3.0	5.5	V
Current Consumption	I_{cc}	Input Signal=0	-	0.7	1.2	mA
Reception Distance	d	$200 \pm 5 \text{Lux}$, $V_{cc}=3\text{V}$	15	20	-	m
B.P.F. Center Frequency	F_o	-	-	38.0	-	KHZ
Peak Wavelength	λ_p	-	-	940	-	nm
Signal Output	S_o	-	--Active Low--			-
High Level Output Voltage	V_{oh}	$V_{cc}=3\text{V}$	2.7	3.0	-	V
		$V_{cc}=5\text{V}$	4.7	5.0	-	V
Low Level Output Voltage	V_{ol}	$V_{in}=0\text{V}$ $I_{sink}=2.0\text{mA}$	-	0.2	0.4	V
Burst Width Tolerance *2	B_w	Burst Wave=500 μs	400	600	800	μs
Half Angle	$\Delta\theta$	-	-	90	-	deg

*2 The output tolerance of burst width received when transmitter sends the burst wave.


■ Carrier Frequency

Relative Reception Distance vs Transmitter carrier Frequency

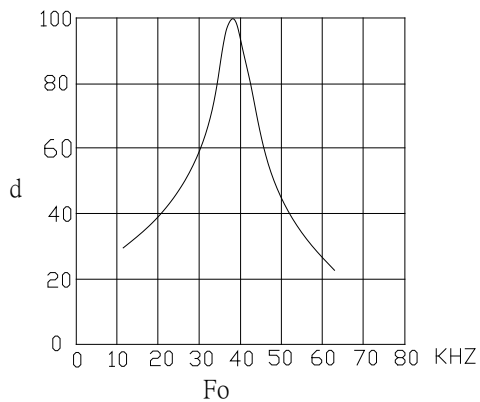


■ For Noisy Power Supply

In case of noisy power supply, please serially insert 100Ω resistor and about 47 μF electrolytic capacitor in Vcc line and ground as follows:

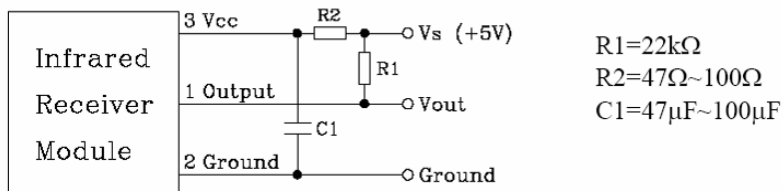

■ Block Diagram

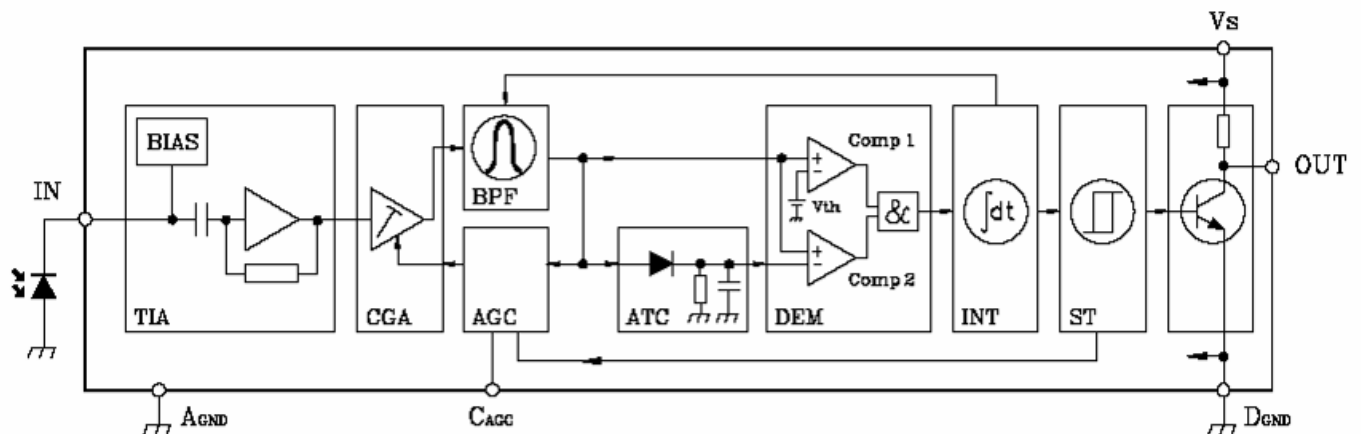

TIA Transimpedance amplifier
 CGA Controlled gain amplifier
 BPF Bandpass filter
 AGC Automatic gain control

ATC Automatic threshold control
 DEM Demodulator
 INT Integrator
 ST Schmitt trigger

■ Testing Method

Distance between emitter and detector specifies maximum distance that output waveform satisfies the standard (FIG-3) under the standard transmitter.

a. Measuring place

Indoor Without extreme reflection of light.

b. Ambient light source

Detecting surface illumination is 200 ± 5 Lux under ordinary white fluorescence lamp of no high frequency lightning.

c. Standard transmitter

Transmitter wave indicated in FIG-2 of standard transmitter is arranged to satisfy $V_O \geq 50\text{mVp-p}$ under the measuring circuit specified in FIG-3


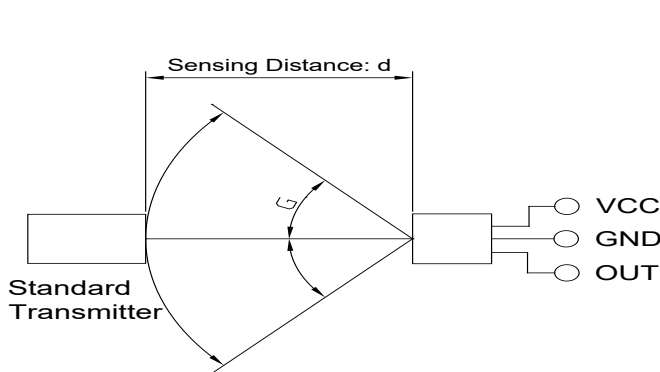


FIG-1

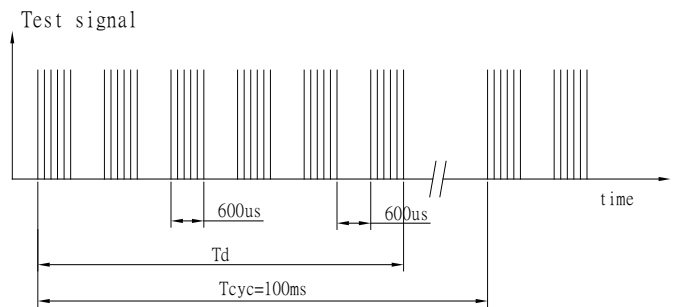

Output signal

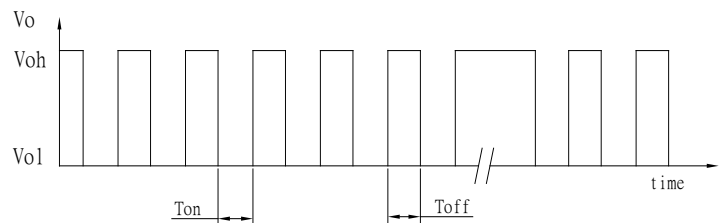


FIG-2


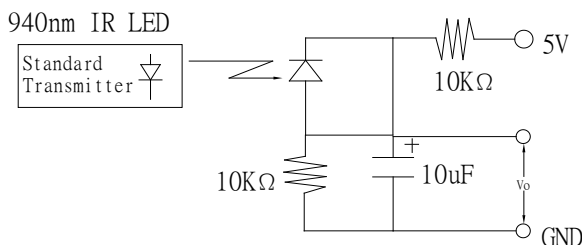


FIG-3 Power Output Measurement Circuit

■ Precautions for Use

- Store and use where there is no force causing transformation or change in quality.
- Store and use where there is no corrosive gas or sea(salt) breeze.
- Store and use where there is no extreme humidity.
- Solder the lead pin within the condition of ratings. After soldering, do not add exterior force.
- Do not wash this device. Wipe the stains of diode side with a soft cloth. You can use the solvent, ethyl alcohol, or methyl alcohol only.
- To prevent static electricity damage to the pre-amp, make sure that the human body, the soldering iron are connected to ground before using.

■ Packing Dimensions

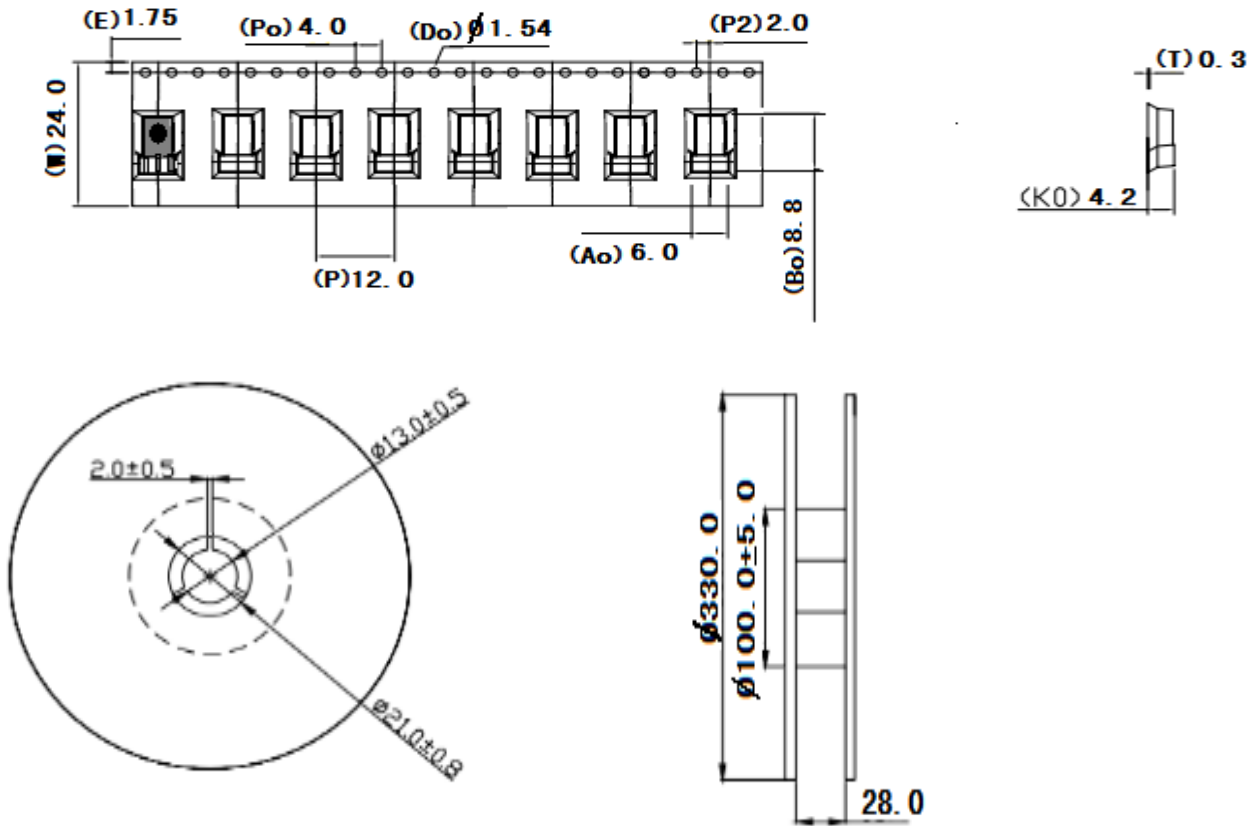

Notes:

1. Unit: mm
2. 1000pcs/Reel