



**OptoSupply**

Light It Up


4.0 x 1.4 x 0.65mm SMD LED

OSXX4014C1A-60MA

## ■Features


- Top view white LED (4.0 x 1.4 x 0.65mm)
- Super high brightness of surface mount LED
- Lead frame package with individual 2 pins
- Compatible to IR reflow soldering.
- MSL:5a

## ■Outline Dimension

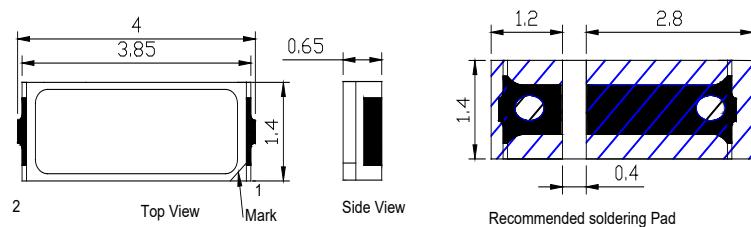

## ■Applications

- General lighting
- Decoration lighting
- Indicator

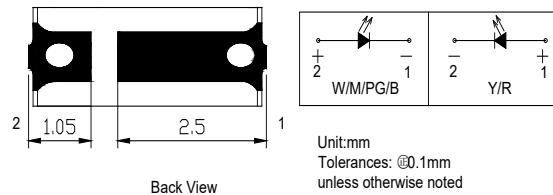

## ■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG/O	Y/R	
DC Forward Current	I <sub>F</sub>	70	70	mA
Pulse Forward Current#	I <sub>FP</sub>	100	100	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>D</sub>	252	196	mW
Operating Temperature	Topr	-40 ~ +85		°C
Storage Temperature	T <sub>Stg</sub>	-40 ~ +85		°C
Lead Soldering Temperature	T <sub>Sol</sub>	260°C/10sec		-

#Pulse width Max 0.1ms, Duty ratio max 1/10

## ■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color	V <sub>F</sub> (V)*			I <sub>R</sub> (μA)	Φv(lm)*			WD(nm)/CCT(K)*			201/2(deg)	
		Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	
		I <sub>F</sub> =60mA			V <sub>R</sub> =5V	I <sub>F</sub> =60mA							
OSW44014C1A-60MA	Pure White	2.8	3.2	3.6	10	20	22	-	5500K	6500	7000K	120	
OSM74014C1A-60MA	Natural White	■	2.8	3.2	3.6	10	18	20	-	3700K	4000	4300K	120
OSM54014C1A-60MA	Warm White	■	2.8	3.2	3.6	10	18	20	-	2800K	3000	3200K	120
OSB44014C1A-60MA	Blue	■	2.8	3.2	3.6	10	2	4	-	455	460	465	120
OSB64014C1A-60MA	Ice Blue	■	2.8	3.2	3.6	10	20	22	-	X:0.19, Y:0.29			120
OSG54014C1A-60MA	Pure Green	■	2.8	3.2	3.6	10	12	14	-	515	520	530	120
OSY54014C1A-60MA	Yellow	■	2.0	2.4	2.8	10	4	6	-	585	590	595	120
OSO54014C1A-60MA	Orange	■	2.8	3.2	3.6	10	18	20	-	600	605	610	120
OSR54014C1A-60MA	Red	■	2.0	2.4	2.8	10	4	6	-	620	625	630	120


\*1 Tolerance of measurements of chromaticity coordinate is ±10%

\*2 Tolerance of measurements of dominant wavelength is ±1nm

\*3 Tolerance of measurements of luminous flux is ±15%

\*4 Tolerance of measurements of forward voltage is ±0.1V

## ■Directivity

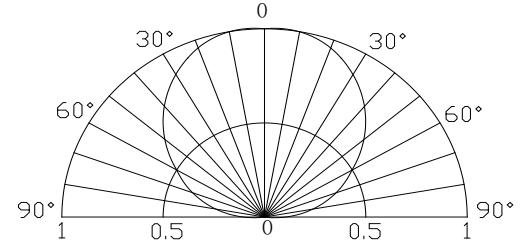


**LED & Application Technologies**



■ Soldering Conditions

Reflow Soldering		Hand Soldering	
Pre-Heat	180 ~ 200°C	Temperature Soldering time	350°C Max. 3 sec. Max. (one time only)
Pre-Heat Time	120 sec. Max.		
Peak Temperature	260°C Max.		
Dipping Time	<b>10 sec. Max.</b>		
Condition	Refer to Temperature-profile		

• Reflow Soldering Condition(Lead-free Solder)

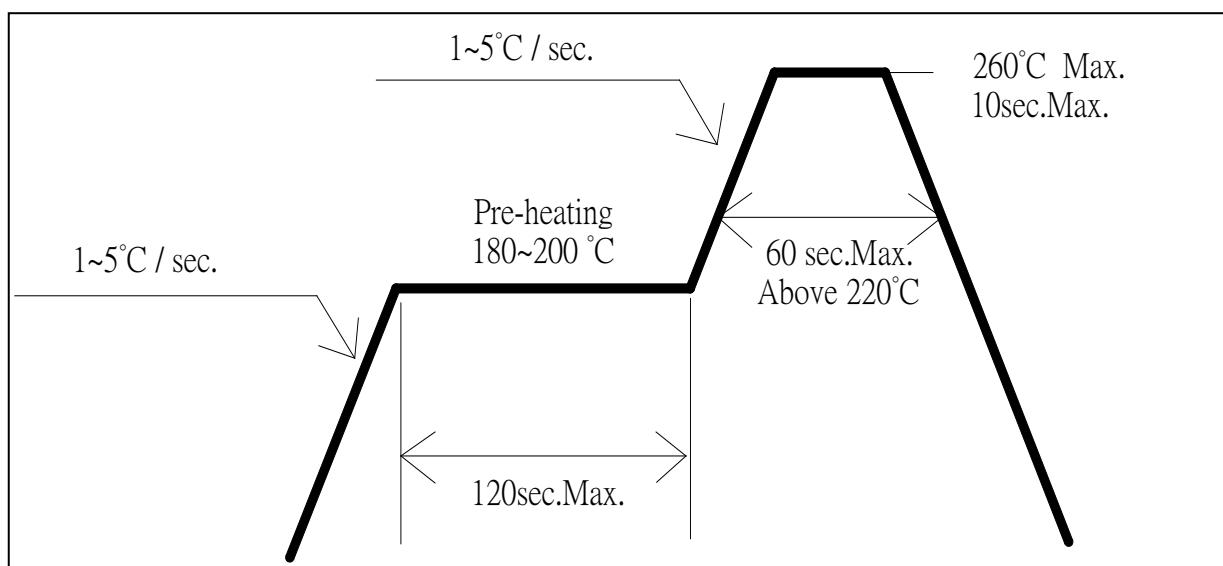

\*Recommended soldering conditions vary according to the type of LED

\*Although the recommended soldering conditions are specified in the above table, reflow, or hand soldering at the lowest possible temperature is desirable for the LEDs.

\*A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.

• All SMD LED products are pb-free soldering available.

• Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.

• Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

• Reflow soldering should not be done more than two times.

• When soldering, do not put stress on the LEDs during heating.

• After soldering, do not warp the circuit board.

## Precautions in Use for Surface Mount Diode

### ■ Storage

- Storage Conditions

Before opening the package:

The LEDs should be kept at 30°C or less and 60%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

- After opening the package:

Soldering should be done right after opening the package (within 24hrs).

Keeping of a fraction, sealing and Temperature: 5~30°C Humidity: Less than 30%.

If the package has been opened more than 24 Hours, components should be dried for 12hrs, at  $60 \pm 5^\circ\text{C}$ .

· Optosupply LED electrode sections are comprised of a silver plated copper alloy. The silver surface may be affected by environments which contain corrosive gases and so on. Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the User use the LEDs as soon as possible.

· Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

**LED & Application Technologies**

