



OptoSupply

Light It Up

1.0 x 0.5 x 0.4 mm Chip LED

OSXX0402C1C


■Features

- Single chip
- Super high brightness of surface mount LED
- Sorting for Iv and Vf @ 5mA of If
- Compact package outline (LxWxT) of 1.0 x 0.5 x 0.4mm
- Compatible to IR reflow soldering.

■Applications

- Backlighting (switches, keys, etc.)
- Marker lights (e.g. steps, exit ways, etc.)

■Outline Dimension

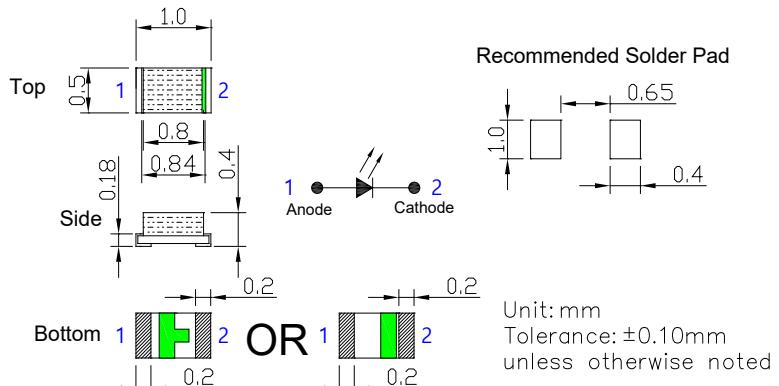

■Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value			Unit
		HR/YG/OR/YL	BL/PG/W/M		
DC Forward Current	I _F	20	20	mA	
Pulse Forward Current#	I _{FP}	100	100	mA	
Reverse Voltage	V _R	5	5	V	
Power Dissipation	P _D	46	66	mW	
Operating Temperature	Topr	-40 ~ +85			°C
Storage Temperature	T _{stg}	-40 ~ +85			°C
Lead Soldering Temperature	T _{sol}	260°C/10sec			-

#Pulse width Max 0.1ms, Duty ratio max 1/10

■Electrical -Optical Characteristics (Ta=25°C)

Part Number	Color	V _F (V)			I _R (μA)	I _v (mcd)			λD(nm)/CCT(K)			2θ1/2(deg)	
		Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	
		I _F =5mA			V _R =5V	I _F =5mA							
OSM50402C1C	Warm White	M	■	-	2.7	3.3	10	80	150	-	2600-3200K	120	
OSWA0402C1C	Pure White	W		-	2.7	3.3	10	80	150	-	6500-9000K	120	
OSB50402C1C	Blue	BL	■	-	2.7	3.3	10	25	40	-	460	465	475
OSG50402C1C	Pure Green	PG	■	-	2.7	3.3	10	120	250	-	515	525	530
OSG80402C1C	Yellow Green	YG	■	-	1.7	2.3	10	5	10	-	565	570	575
OSY50402C1C	Yellow	YL	■	-	1.7	2.3	10	15	20	-	585	590	595
OSO50402C1C	Orange	OR	■	-	1.7	2.3	10	15	30	-	600	605	610
OSR50402C1C	Red	HR	■	-	1.7	2.3	10	25	40	-	620	625	630


*1 Tolerance of measurements of chromaticity coordinate is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

■Directivity

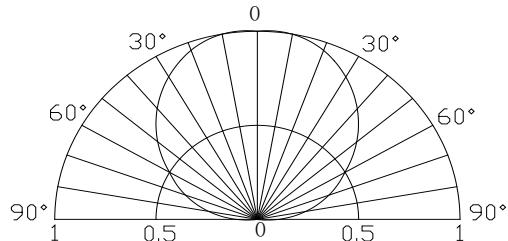

LED & Application Technologies




REACH
The new EU chemicals legislation



■ Soldering Conditions

Reflow Soldering		Hand Soldering	
Pre-Heat	180 ~ 200°C	Temperature Soldering time	350°C Max. 3 sec. Max. (one time only)
Pre-Heat Time	120 sec. Max.		
Peak Temperature	260°C Max.		
Dipping Time	10 sec. Max.		
Condition	Refer to Temperature-profile		

• Reflow Soldering Condition(Lead-free Solder)

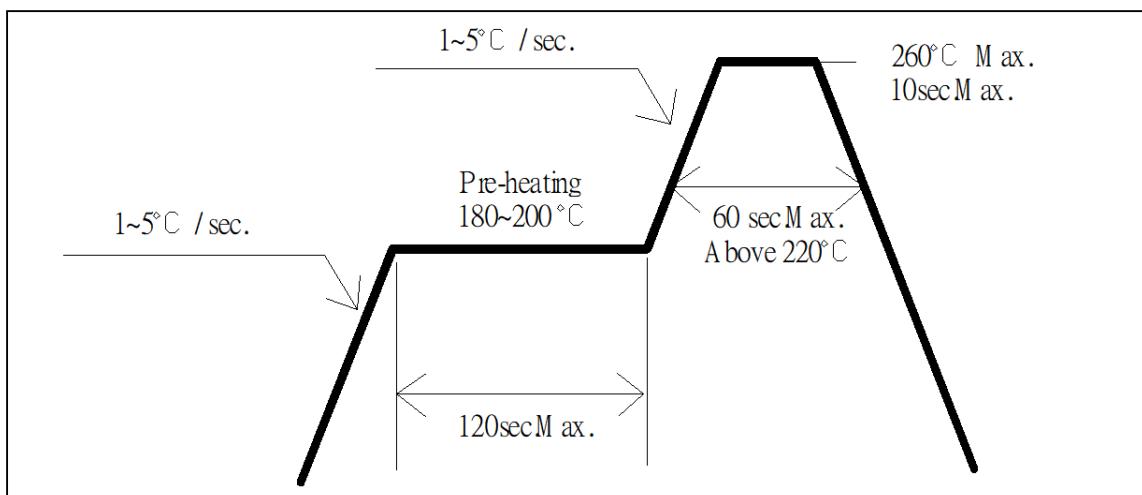

*Recommended soldering conditions vary according to the type of LED

*Although the recommended soldering conditions are specified in the above table, reflow, or hand soldering at the lowest possible temperature is desirable for the LEDs.

*A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.

• All SMD LED products are pb-free soldering available.

• Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.

• Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

• Reflow soldering should not be done more than two times.

• When soldering, do not put stress on the LEDs during heating.



• After soldering, do not warp the circuit board.

LED & Application Technologies



■ Taping and Orientation

1. Quantity: 4000pcs/Reel 2. Diameter: 178 mm 3. General Tolerance: ± 0.1

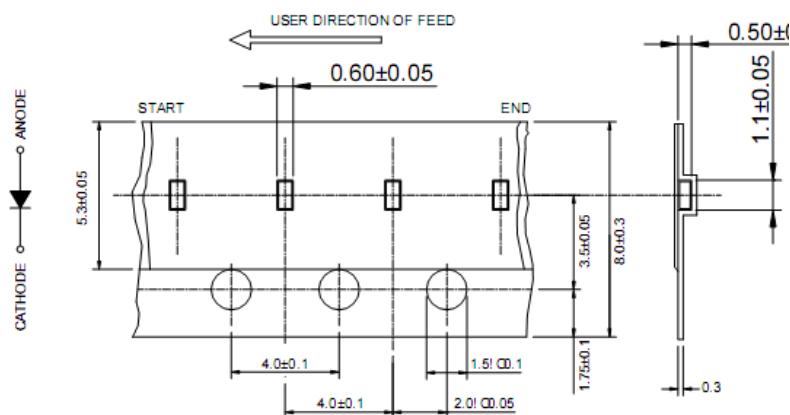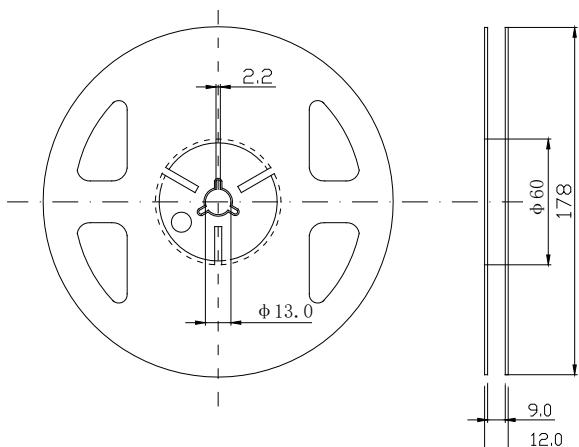

■ Cautions

1. After open the package, the LED's floor life is 4 Weeks under 30°C or less and 60%RH or less(MSL:2a).
2. Heat generation must be taken into design consideration when using the LED.
3. Power must be applied resistors for protection, over current would be caused the optic damage to the devices and wavelength shift.
4. Manual tip solder may cause the damage to Chip devices, so advised that heat of iron should be lower than 15W with temperature control under 5 seconds at 230-260 deg. C. (The device would be got damage in re working process, recommended under 5 seconds at 230-260 deg. C)
5. All equipment and machinery must be properly grounded. It is recommended to use a wristband or anti-electrostatic glove when handing the LED.
6. Use IPA as a solvent for cleaning the LED. The other solvent may dissolve the LED package and the epoxy, Ultrasonic cleaning should not be done.
7. Damaged LED will show unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LED get unlight at low current.