



OptoSupply

Light It Up

1.6 x 0.8 x 0.4mm Chip LED

OS1608XX

■Features

- Single chip
- 1.6x0.8x0.4mm (0603) standard package.
- Sorting for I_v and V_F @ 5mA of I_F
- Compatible to IR reflow soldering.
-

■Applications

- Backlighting (switches, keys, etc.)
- Marker lights (e.g. steps, exit ways, etc.)
-

■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/B/PG	G8/Y5/O5/R5	
DC Forward Current	I_F	20	20	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	68	48	mW
Operating Temperature	Topr	-40 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +85		°C
Lead Soldering Temperature	Tsol	260°C/10sec		-

#Pulse width Max 0.1ms, Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color	V _F (V)			I _R (μA)	I _v (mcd)			λD(nm)/CCT(K)			201/2(deg)	
		Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.	
		I _F =5mA			V _R =5V	I _F =5mA							
OS1608W4	Pure White	W4	2.5	2.8	3.4	10	100	-	200	5500-6500-8500K		120	
OS1608W5	Cool White	W5	2.5	2.8	3.4	10	100	-	200	10000-15000-20000K		120	
OS1608M5	Warm White	M5	■	2.5	2.8	3.4	10	100	-	200	2700-3000-3300K		120
OS1608B5	Blue	B5	■	2.5	2.8	3.4	10	14	-	40	460	470	475
OS1608G5	Pure Green	G5	■	2.5	2.8	3.4	10	120	-	220	520	525	530
OS1608G8	Yellow Green	G8	■	1.6	1.8	2.4	10	5	-	15	565	570	575
OS1608Y5	Yellow	Y5	■	1.6	1.8	2.4	10	15	-	50	585	590	595
OS1608O5	Orange	O5	■	1.6	1.8	2.4	10	15	-	50	600	605	610
OS1608R5	Red	R5	■	1.6	1.8	2.4	10	15	-	50	617	625	630

*1 Tolerance of measurements of chromaticity coordinate is $\pm 10\%$

*2 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$

*4 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$

LED & Application Technologies



ISO 9001: 2008





OptoSupply

Light It Up


1.6 x 0.8 x 0.4mm Chip LED

OS1608XX

■ **Soldering Conditions**

Reflow Soldering		Hand Soldering	
Pre-Heat	180 ~ 200°C	Temperature Soldering time	350°C Max. 3 sec. Max. (one time only)
Pre-Heat Time	120 sec. Max.		
Peak Temperature	260°C Max.		
Dipping Time	10 sec. Max.		
Condition	Refer to Temperature-profile		

• **Reflow Soldering Condition(Lead-free Solder)**

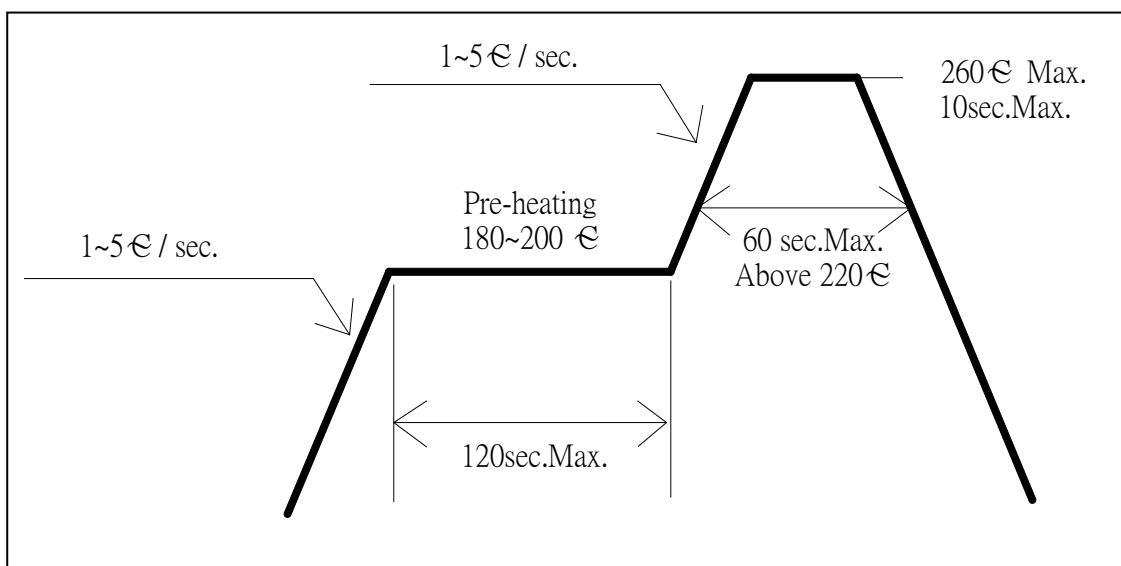

*Recommended soldering conditions vary according to the type of LED

*Although the recommended soldering conditions are specified in the above table, reflow, or hand soldering at the lowest possible temperature is desirable for the LEDs.

*A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.

• All SMD LED products are pb-free soldering available.

• Occasionally there is a brightness decrease caused by the influence of heat or ambient atmosphere during air reflow. It is recommended that the User use the nitrogen reflow method.

• Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

• Reflow soldering should not be done more than two times.


• When soldering, do not put stress on the LEDs during heating.

• After soldering, do not warp the circuit board.

LED & Application Technologies



REACH
The new EU chemicals legislation





OptoSupply

Light It Up

1.6 x 0.8 x 0.4mm Chip LED


OS1608XX

■ Reel & Tape Dimensions

Quantity: 4,000pcss/Reel

Diameter: 178 mm

General Tolerance: ± 0.1

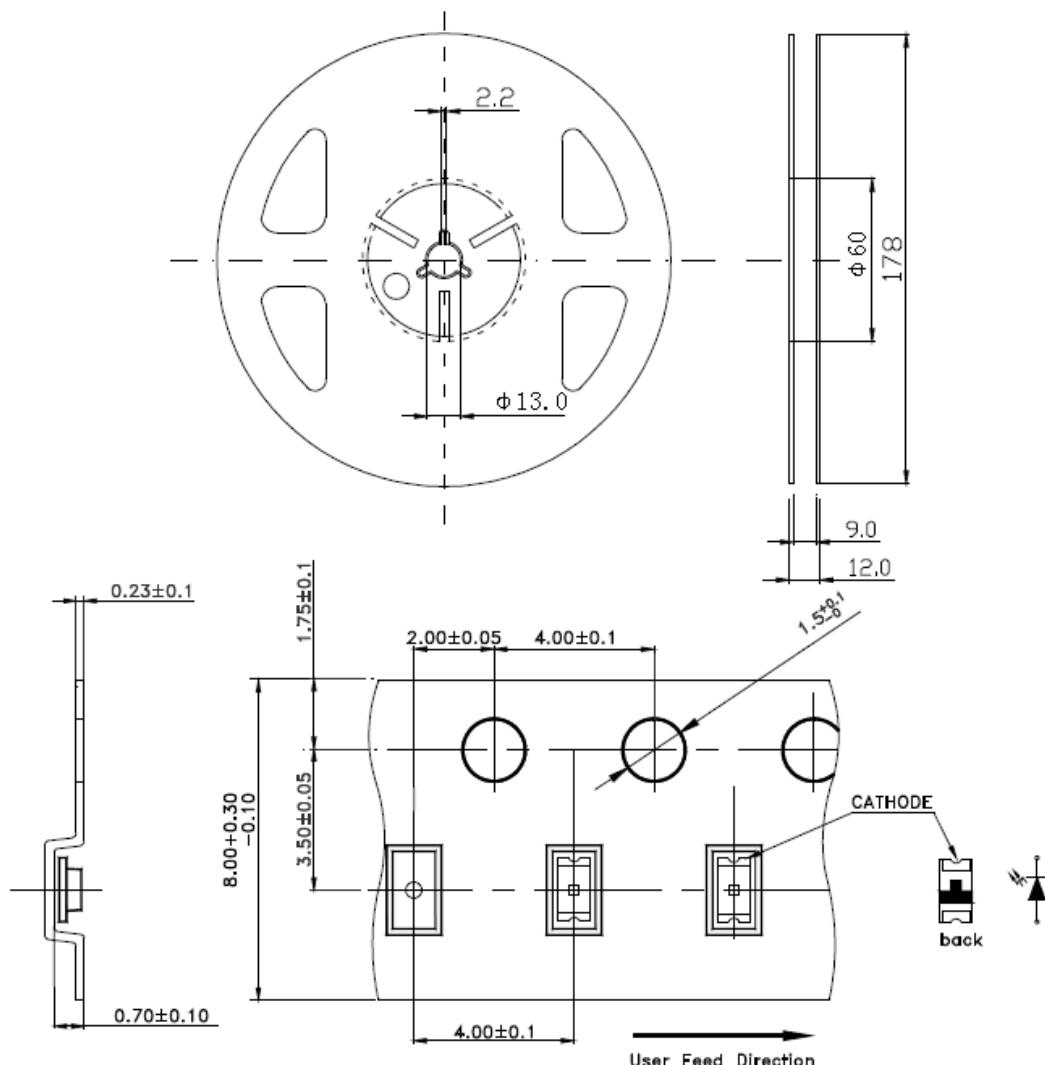


Notes: 1. All dimensions are in millimeters ;

LED & Application Technologies



REACH
The new EU chemicals legislation



■ Cautions:

1. After open the package, the LED's floor life is 4 Weeks under 30°C or less and 60%RH or less(MSL:2a).
2. Heat generation must be taken into design consideration when using the LED.
3. Power must be applied resistors for protection, over current would be caused the optic damage to the devices and wavelength shift.
4. Manual tip solder may cause the damage to Chip devices, so advised that heat of iron should be lower than 15W with temperature control under 5 seconds at 230-260 deg. C. (The device would be got damage in re working process, recommended under 5 seconds at 230-260 deg. C)
5. All equipment and machinery must be properly grounded. It is recommended to use a wristband or anti-electrostatic glove when handing the LED.
6. Use IPA as a solvent for cleaning the LED. The other solvent may dissolve the LED package and the epoxy, Ultrasonic cleaning should not be done.
7. Damaged LED will show unusual characteristics such as leak current remarkably increase, turn-on voltage becomes lower and the LED get unlight at low current.