
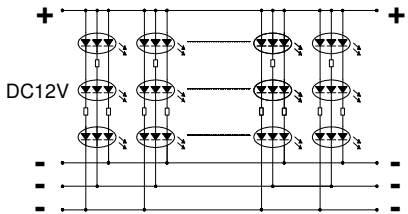
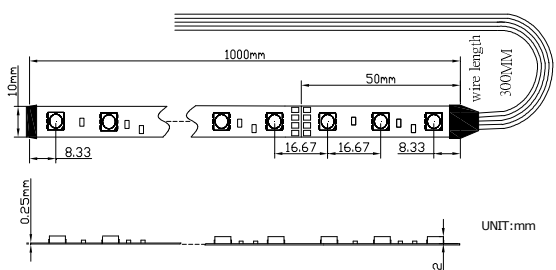
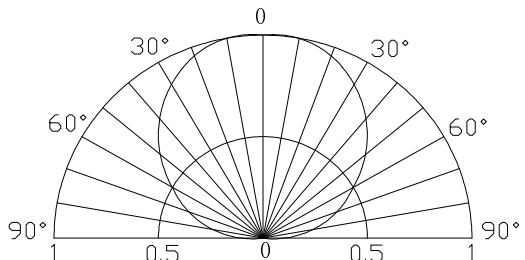


LED Light Strip
60 x SMD5050 /Meter
OSW0XX56

<p>Descriptions:</p> <ul style="list-style-type: none"> •Non-waterproof •Low power consumption •Voltage available in DC12V •LED Type: 5050 SMD LED • With a self-adhesive back <p>Application:</p> <ul style="list-style-type: none"> •Channel letter signs •Indirect accent décor light •Large area back lighting •Under counter light •Decorate building's contour •Substitute neon light 	<p>Photo</p>  <p>Photo</p> <p>Circuit Diagram</p>  <p>Outline Dimension</p>  <p style="text-align: right;">Unit: mm</p>
---	---

Typical Performance (Ta=25°C)

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	Pm		14.4	25.2	w
Input Voltage(DC)	Vi		12	14	V
Input Current	If		1.2	1.8	A
Beam Pattern	BP		120		Deg
Operating Temperature	Topr	-30		85	°C
Storage Temperature	Tstg	-40		100	°C
LED Quantity	QTY		60		PCS
Total Length	Lmod.		1000		mm



Device Selection Guide

Module No.	Color	Dom. Wavelength (Typ.)	Intensity / LED (Typ.)
OSW0W456	Pure White	5500~6500~8500K	12~14 lm
OSW0M556	Warm White	2700~3000~3200	11~13 lm
OSW0R556	Red	625±5nm	900 mcd
OSW0Y556	Yellow	590±5nm	875 mcd
OSW0G556	Green	525±5nm	1500 mcd
OSW0B556	Blue	470±5nm	775 mcd
OSW0TC56	Red	625±5nm	180 mcd
	Green	525±5nm	900 mcd
	Blue	470±5nm	200 mcd