
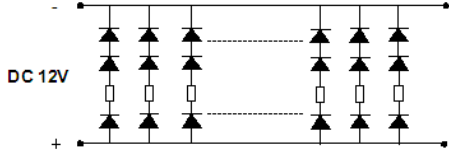
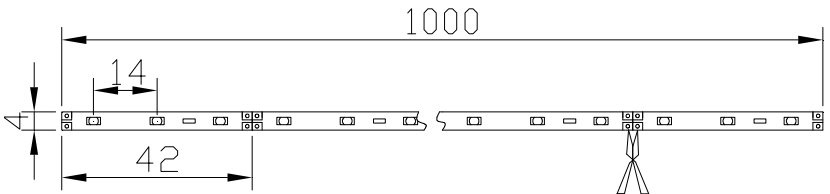
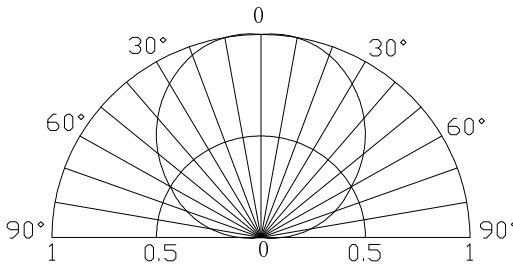


UltraThin Catable Rigid LED Light Bar
72 x SMD 2835 /Meter
OERBW0XX28

<p>Descriptions:</p> <ul style="list-style-type: none"> •Low power consumption •Voltage available in DC12V •LED Type: 2835 SMD LED •Can be cut at every 3 LEDs •Dimension: 1000(L)x4(W)x1(T)mm <p>Application:</p> <ul style="list-style-type: none"> •Auto lighting •Channel letter signs •Indirect accent décor light •Large area back lighting •Under counter light •Decorate building's contour •Substitute neon light 	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>Photo</p>  </div> <div style="width: 45%;"> <p>Circuit Diagram</p>  </div> </div> <div style="text-align: center; margin-top: 20px;"> <p>Outline Dimension</p>  <p>Unit: mm Tolerance: ± 1</p> </div>
---	--

Typical Performance (Ta=25°C)

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	Pm	-	14.4	20	w
Input Voltage(DC)	Vi	-	12	14	V
Input Current	If	-	1.2	1.4	A
Beam Pattern	BP	-	120	-	Deg
Operating Temperature	Topr	-30	-	85	°C
Storage Temperature	Tstg	-40	-	100	°C
LED Quantity	QTY	-	72	-	PCS
Total Length	Lmod.	-	1000	-	mm



Device Selection Guide

Module No.	Color	CCT (Typ.)	Lumen Flux / LED (Typ.)
OERBW0W428	Pure White	5500K~6500K~8500K	19-21 lm