


## ■Features

- High Radiant Power LEDs
- 5mm Round Standard Directivity
- UV Resistant Epoxy
- Pale Red Brown Transparent Type

## ■Outline Dimension

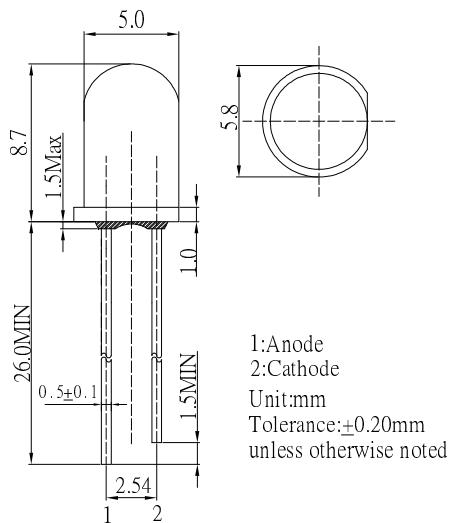

## ■Applications

- IrDA
- Encoder
- Data Communication


## ■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Current	I <sub>F</sub>	100	mA
Pulse Forward Current#	I <sub>FP</sub>	1000	mA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	P <sub>D</sub>	180	mW
Operating Temperature	T <sub>opr</sub>	-30 ~ +85	°C
Storage Temperature	T <sub>tsg</sub>	-40~ +100	°C
Lead Soldering Temperature	T <sub>sol</sub>	260°C/5sec	-

#Pulse width Max.10ms Duty ratio max 1/10

## ■Directivity

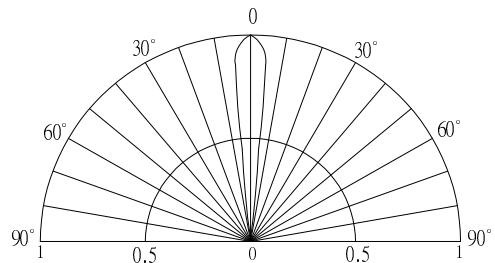

## ■Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =100mA	-	1.6	1.8	V
DC Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Peak Wavelength *	λ <sub>p</sub>	I <sub>F</sub> =100mA	-	850	-	nm
Radiant Power	P <sub>O</sub>	I <sub>F</sub> =100mA	45	55	-	mW
Radiant Intensity *	I <sub>e</sub>	I <sub>F</sub> =100mA	200	250	-	mW/Sr
50% Power Angle	2θ <sub>1/2</sub>	I <sub>F</sub> =100mA	-	15	-	deg

\*<sub>1</sub> Tolerance of measurements of Peak wavelength is  $\pm 1\text{nm}$

\*<sub>2</sub> Tolerance of measurements of Radiant Intensity is  $\pm 15\%$

\*<sub>3</sub> Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$