

**0.39 Inch Three Digit Display**

**OSL30391-IX (Common Anode type)**

**OSL30391-LX (Common Cathode type)**

## ■ Features

- 0.39 Inch Three Digit Display
- Long lifetime operation
- IC compatible
- Low power dissipation
- Number of Pins:12

## ■ Applications

- Counting device
- Clock

## ■ Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value			Unit
		RA/R/YG/Y	B/G/W		
DC Forward Current	I <sub>F</sub>	20	20		mA
Pulse Forward Current#	I <sub>FP</sub>	100	100		mA
Reverse Voltage	V <sub>R</sub>	5	5		V
Power Dissipation	P <sub>t</sub>	50	72		mW
Operating Temperature	Topr	-30 ~ +70			°C
Storage Temperature	Tstg	-40~ +85			°C
Lead Soldering Temperature(1.6mm from seating plane)	Tsol	260°C/5sec			°C

#Pulse width Max.10ms Duty ratio max 1/10

## ■ Electrical -Optical Characteristics (Ta=25°C)

Part Number	Color	V <sub>F</sub> (V)			I <sub>R</sub> (μA)	Iv(mcd)			λD(nm)		
		Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
		I <sub>F</sub> =20mA			V <sub>R</sub> =5V	I <sub>F</sub> =20mA					
OSL30391-IW(LW)	White	W	-	3.1	3.6	20	-	65	-	8000-18000K	
OSL30391-IB(LB)	Blue	B	■	-	3.1	3.6	20	-	65	-	460 470 475
OSL30391-IG(LG)	Pure Green	G	■	-	3.1	3.6	20	-	189	-	515 520 530
OSL30391-IYG(LYG)	Yellow Green	YG	■	-	2.1	2.5	20	-	12	-	565 570 575
OSL30391-IY(LY)	Yellow	Y	■	-	2.1	2.5	20	-	55	-	585 590 595
OSL30391-IR(LR)	Red	R	■	-	2.1	2.5	20	-	26	-	630 640 650
OSL30391-IRA(LRA)	High Luminance Red	RA	■	-	2.1	2.5	20	-	100	-	620 625 630

\*1 Tolerance of measurements of chromaticity coordinate is  $\pm 10\%$

\*2 Tolerance of measurements of dominant wavelength is  $\pm 1\text{nm}$

\*3 Tolerance of measurements of luminous intensity is  $\pm 15\%$

\*4 Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$



# OptoSupply

*Light It Up*

**0.39 Inch Three Digit Display**

**OSL30391-IX (Common Anode type)**

**OSL30391-LX (Common Cathode type)**

## ■ Package Dimensions and Pin Function



### OSL30391-IX (Common Anode type)

Note:

1,Unit : mm( Tolerance: $\pm 0.25$ mm

unless otherwise noted)

2, The slope angle of any PIN  
may be $\pm 5.0^\circ$ Max

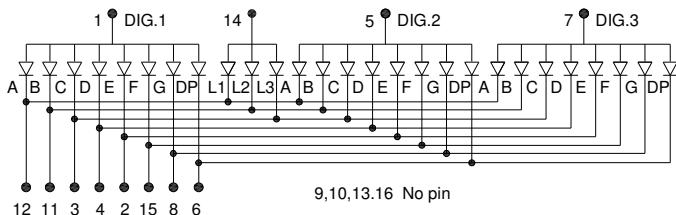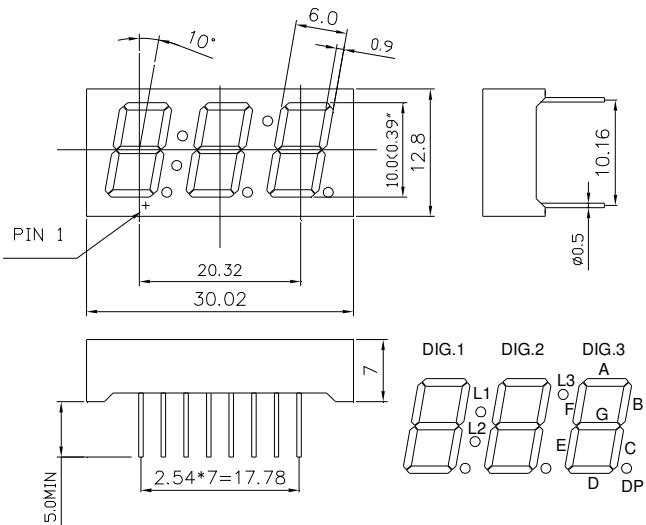



### OSL30391-LX (Common Cathode type)

Note:

1,Unit : mm( Tolerance: $\pm 0.25$ mm

unless otherwise noted)

2, The slope angle of any PIN  
may be $\pm 5.0^\circ$ Max

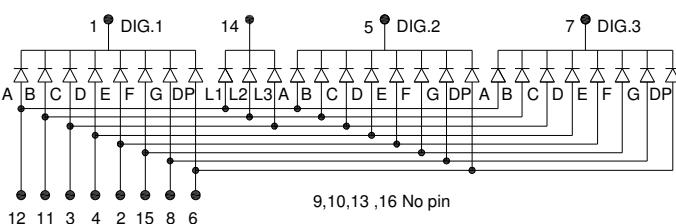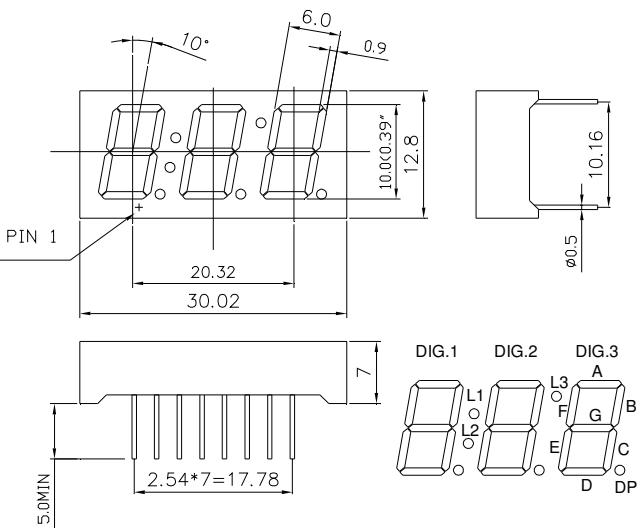

**LED & Application Technologies**



**REACH**  
The new EU chemicals legislation

