


■Features

- Single chip
- Super high brightness of surface mount LED
- Compact package outline
(LxWxT) of 1.6mm x 0.8mm x 0.95mm
- Compatible to IR reflow soldering.


■Applications

- Backlighting (switches, keys, etc.)
- Marker lights (e.g. steps, exit ways, etc.)

■Outline Dimension

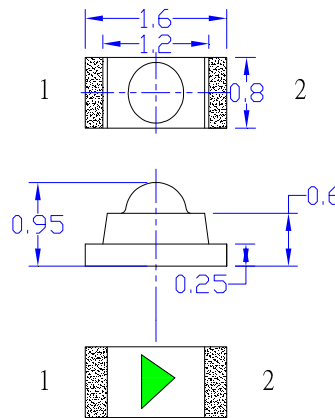

1. Anode  2. Cathode



Unit:mm
Tolerance:±0.2


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbo l	Value		Unit
		B5/G5	G8/Y5/O5/R5	
DC Forward Current	I _F	30	25	mA
Pulse Forward Current*	I _{FP}	100	80	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	60	mW
Operating Temperature	T _{opr}	-40 ~ +85		°C
Storage Temperature	T _{stg}	-40~ +85		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-





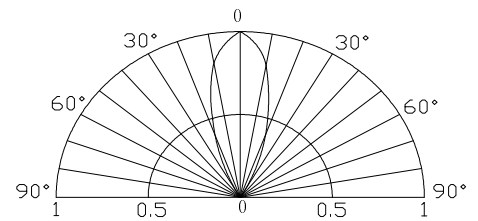

*Pulse width Max 0.1ms, Duty ratio max 1/10

■Directivity



■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V _F (V)			I _R (μA)	I _v (mcd)			λD (nm)			2θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V			I _F =20mA				
OSB5060341F	Blue	B5		2.8	3.1	3.4	10	150	350	-	460	465	470	35
OSG5060341F	True Green	G5		2.8	3.1	3.4	10	1300	2500	-	518	521	526	35
OSG8060341F	Yellow green	G8		1.8	2.1	2.4	10	70	150	-	565	570	575	35
OSY5060341F	Yellow	Y5		1.8	2.1	2.4	10	200	400	-	585	590	595	35
OSO5060341F	Orange	O5		1.8	2.1	2.4	10	200	400	-	600	605	610	35
OSR5060341F	Red	R5		1.8	2.1	2.4	10	200	400	-	617	621	625	35

*1 Tolerance of measurements of chromaticity coordinate is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V