
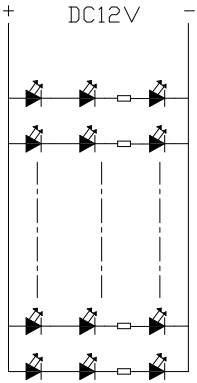
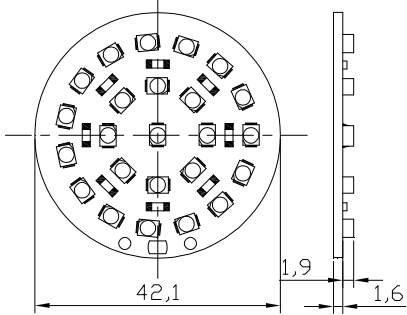


UV SMD LED Module
24 x SMD3528
OSPRO2X2-VXYLS1C1A

<p>Descriptions:</p> <ul style="list-style-type: none"> •Voltage available in DC12V •LED Type: UV 3528 SMD •MCPCB <p>Application:</p> <ul style="list-style-type: none"> • Photovoltaic industry • Beauty treatment • Medical treatment • Mineral composition detection • Crime scene investigation • Mechanical equipment lights • Back lighting • Other lighting 	<p>Photo</p>  <p>Circuit Diagram</p>  <p>Outline Dimension</p>  <p>Unit: mm</p>
---	--

Typical Performance (Ta=25°C)

Items	Symbol	Min.	Typ.	Max.	Units
LED Module Power	Pm	-	1.9	2.8	w
Input Voltage(DC)	Vi	-	12	14	V
Input Current	If	-	0.16	0.2	A
Operating Temperature	Topr	-30	-	85	°C
Storage Temperature	Tstg	-40	-	100	°C
LED Quantity	QTY	-	24	-	PCS
PCB Diameter	Lmod.	-	42.1	-	mm

Device Selection Guide

Module No.	Wavelength(Typ.)	Overall Radiant Flux (Typ.)	LED Module Beam Angle
OSPRO2X2-V5YLS1C1A	405±5nm	120mW	120 deg
OSPRO2X2-V4YLS1C1A	395±5nm	120mW	120 deg