

■ **Features**

- 0.56 Inch Two Digit Display
- Long lifetime operation
- IC compatible
- Low power dissipation
- Black surface & white segment or dot
- Number of pins: 18

■ **Applications**

- Counting device
- Clock

■ **Absolute Maximum Rating** (Ta=25°C)

■ **Photo**



Item	Symbol	Value		Unit
		RA/R/YG/Y	B/G/W	
DC Forward Current	I <sub>F</sub>	20	20	mA
Pulse Forward Current#	I <sub>FP</sub>	100	100	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>t</sub>	44	66	mW
Operating Temperature	T <sub>opr</sub>	-30 ~ +70		°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +85		°C
Lead Soldering Temperature(1.6mm from seating plane)	T <sub>sol</sub>	260°C/5sec		°C

#Pulse width Max.10ms Duty ratio max 1/10

■ **Electrical -Optical Characteristics** (Ta=25°C)

Part Number	Color		V <sub>F</sub> (V)			I <sub>R</sub> (μA)	I <sub>v</sub> (mcd)			λD(nm)		
			Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
			I <sub>F</sub> =20mA			V <sub>R</sub> =5V	I <sub>F</sub> =20mA					
OSL20561-IW(LW)	White	W	-	3.1	3.6	20	-	65	-	X=0.27,Y=0.28		
OSL20561-IB(LB)	Blue	B	-	3.1	3.6	20	-	50	-	-	470	-
OSL20561-IG(LG)	Pure Green	G	-	3.1	3.6	20	-	200	-	-	525	-
OSL20561-IYG(LYG)	Yellow Green	YG	-	2.1	2.6	20	-	12	-	-	571	-
OSL20561-IY(LY)	Yellow	Y	-	2.1	2.5	20	-	60	-	-	590	-
OSL20561-IR(LR)	Red	R	-	2.1	2.5	20	-	26	-	-	630	-
OSL20561-IRA(LRA)	High Luminance Red	RA	-	2.1	2.5	20	-	100	-	-	625	-

\*1 Tolerance of measurements of chromaticity coordinate is ±10%


\*2 Tolerance of measurements of dominant wavelength is ±1nm

\*3 Tolerance of measurements of luminous intensity is ±15%


\*4 Tolerance of measurements of forward voltage is±0.1V

■ Package Dimensions and Pin Function


**OSL20561-IX  
(Common Anode type)**

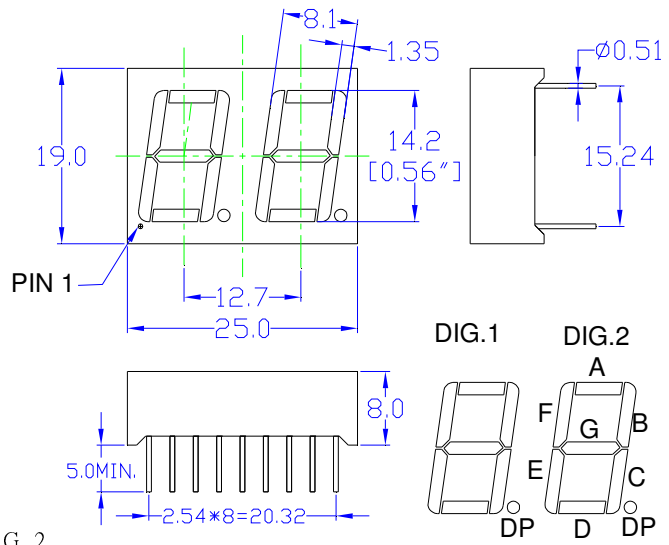


Note:  
1, Unit : mm (Tolerance: ±0.25mm unless otherwise noted)  
2, The slope angle of any PIN may be ±5.0° Max

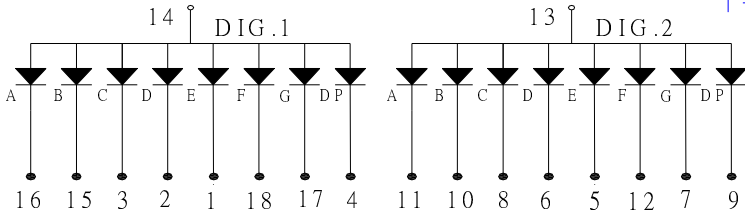

**OSL20561-LX  
(Common Cathode type)**

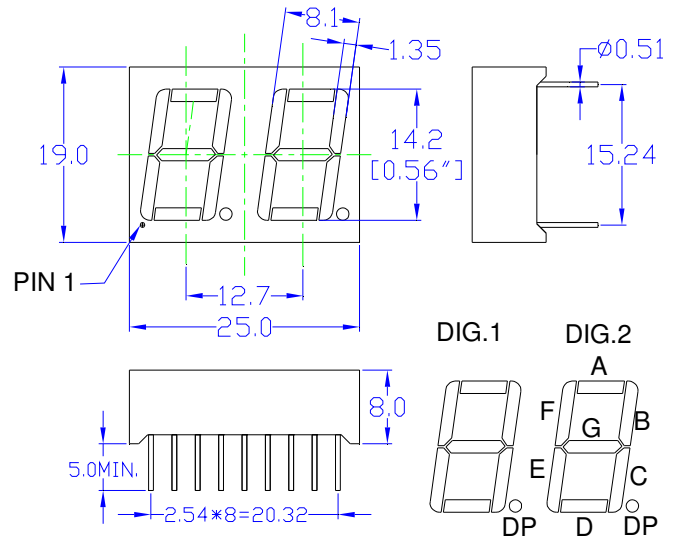

Note:  
1, Unit : mm (Tolerance: ±0.25mm unless otherwise noted)  
2, The slope angle of any PIN may be ±5.0° Max

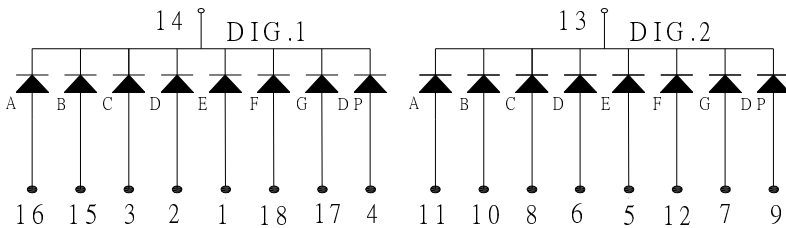

<b>0.56 Inch Two Digit Display</b>
<b>OSL20561-IX (Common Anode type)</b>
<b>OSL20561-LX (Common Cathode type)</b>

## LAMP APPLICATION (PB FREE SOLDERJING)

Apply to Display (DIP) SERIES.


### Description:

#### (1) Manual soldering (Solder Iron)

- (1.1) Temperature at tip of the iron: 350°C Max.
- (1.2) It's banned to load any stress on the resin during soldering.
- (1.3) Soldering time: 3sec.Max.(one time only.)
- (1.4) Leave 3mm of minimum distance from the base of the epoxy.

#### (2) Dip Soldering (Wave Soldering-Solder Bath)

- (2.1) Leave 3mm of minimum distance from the base of the epoxy.  
Soldering beyond the base of the tie bar (stand off) is recommended.
- (2.2) When soldering, do not put stress on the Display during heating.
- (2.3) Cutting the lead frames at high temperatures may cause LED failure.
- (2.4) Never take next process until the component is cooled down to room temperature after reflow.
- (2.5) After soldering, do not warp the circuit board.
- (2.6) The recommended dip soldering profile is the following.

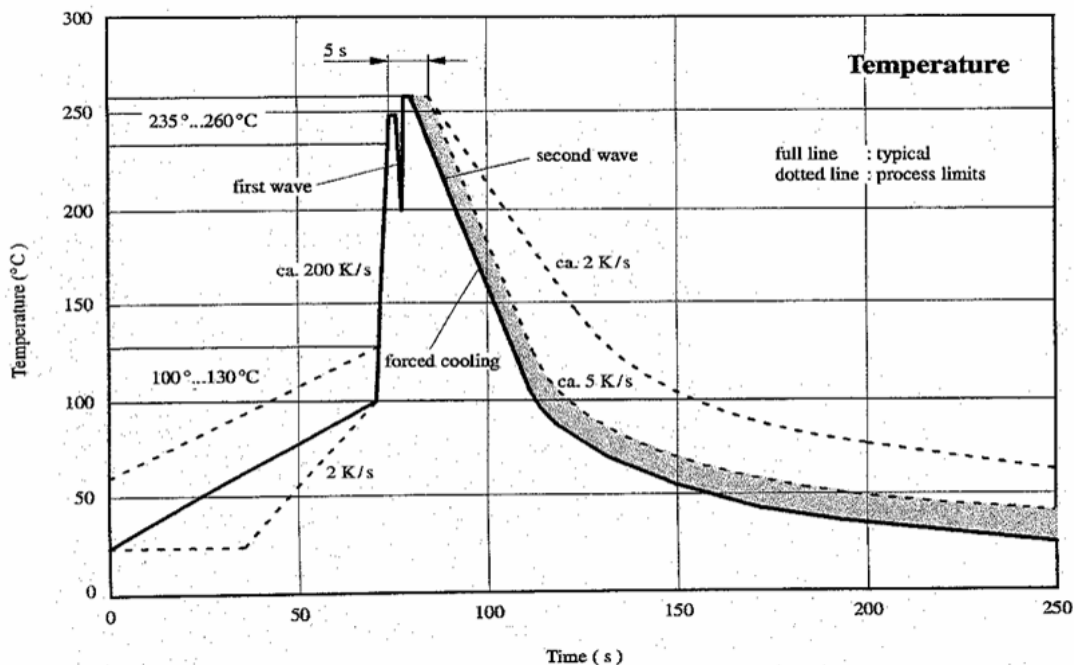

Wave soldering of double wave optodevices