



■Description

- 100pcs standard 0603 Chip LED are supplied in a storage box
- Easy to use and storage
- Widely applied to DIY projects, school science experiments, car decorations, etc.

■Features

- 1.6*0.8*0.6mm standard 120° directivity
- Pure green color
- Water clear

■Product Picture

100pcs/Box (Dimensions:67**49*23mm)




■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
		Pure Green	
DC Forward Current	I _F	20	mA
Pulse Forward Current#	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Power Dissipation	P _D	102	mW
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C/10sec	-

#Pulse width Max.10ms Duty ratio max 1/10

■Outline Dimension

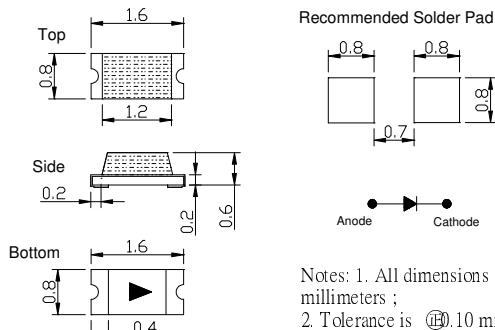


Notes: 1. All dimensions are in millimeters ;
2. Tolerance is ± 0.10 mm unless otherwise noted.

■Electrical -Optical Characteristics

(Ta=25°C)

0603 Chip LED	
LED P/N	OSG50603
Light Color	Pure Green
Lens Color	Water Clear
Wavelength*1	520-530nm
Luminous Intensity(typ.)*2	160mcd
Forward Voltage*3	2.5-3.4V
Forward Current	5mA
Viewing Angle(typ.)	120°
Quantity(pcs)/Box	100

■Directivity

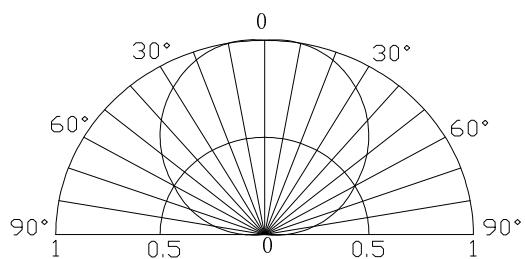
 *1 Tolerance of measurements of dominant wavelength is ± 1 nm

 *2 Tolerance of measurements of luminous intensity is $\pm 15\%$

 *3 Tolerance of measurements of forward voltage is ± 0.1 V