


■Features

- High Luminous LEDs
- 5mm Round Standard Directivity
- UV Resistant Epoxy
- Used 0.8~1.6V DC Drive (Such 1 piece AA or AAA Size Battery)
- Cost Effective (Saves Space and battery Cost)
- Bi-Color
- White diffused Type

■Applications

- Flashlight
- Other Lighting

■Outline Dimension

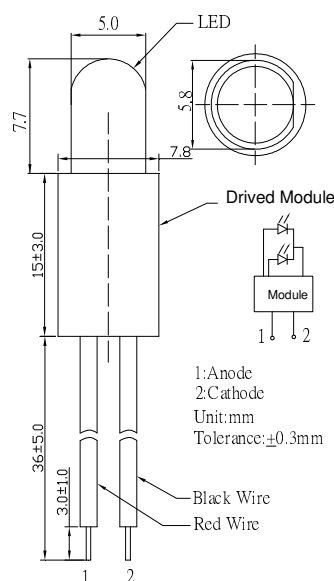


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Voltage	V _F	1.7	V
Oscillator Frequency*	Fled	1.8	Hz
Duty Cycle	Duty	1/2	-
Operating Temperature	Topr	-30 ~ +85	°C
Storage Temperature	Tstg	-30 ~ +85	°C
Lead Soldering Temperature	Tsol	260°C/5sec	-

■Directivity

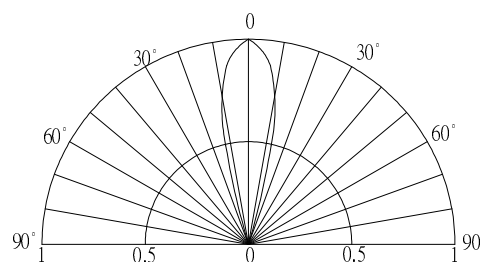

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color		I _F (mA)		I _v (mcd)*			λD(nm)*			2θ1/2(deg)
			Input	In LED	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
			V _F = 1.2V		V _F = 1.2V						
OSBWDS5A32A-W1V	Cool White	W	20±5	7±2	750	1120	-	X=0.27, Y=0.28			30
	Blue	B			500	750	-	465	470	475	
OSRPM5A32A-W1V	Red	R	20±5	7±2	750	1120	-	620	625	630	
	Pure Green	G			1120	1560	-	520	525	530	
OSRBMS5A32A-W1V	Red	R	20±5	7±2	750	1120	-	620	625	630	
	Blue	B			500	750	-	465	470	475	

*1 Tolerance of chromaticity coordinates is ±10%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V

*5 Tolerance of measurements of frequency is ±20%