


■Features

- High Luminous LEDs
- 5.35x5.35x7mm Triangular Standard Directivity
- UV Resistant Epoxy
- Low power consumption
- Color Transparent / Water Clear (W, M only)

■Applications

- Electronic Signs and Signals
- Indications
- Back Lighting
- General Use

■Outline Dimension

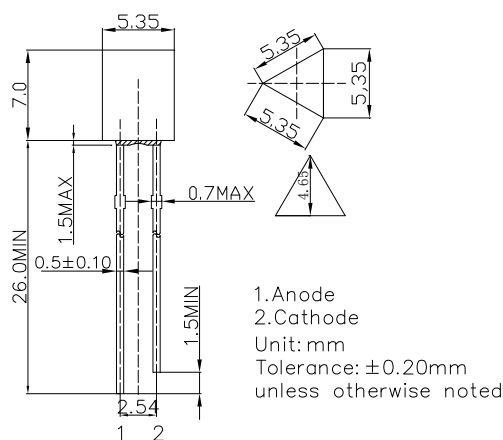


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG	YG/Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C/5sec		-

#Pulse width Max 0.1ms, Duty ratio max 1/10

■Directivity

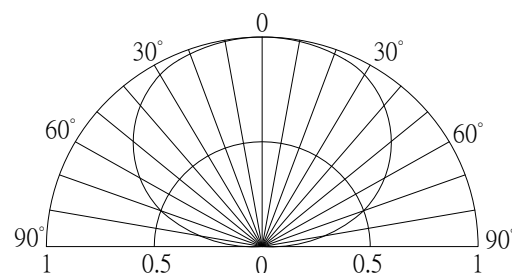

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V _F (V)*			I _R (μA)	I _v (mcd)*			λD (nm)*			2θ1/2 (deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V	I _F =20mA			I _F =20mA			
OSW5DK7ZE1B	Cool White	W		-	2.9	3.4	10	750	1560	-	CCT:8000-18000K			140
OSM5DK7ZE1B	Warm White	M		-	2.9	3.4	10	750	1560	-	CCT:2700-3300K			140
OSB5SA7ZE3B	Blue	B		-	2.9	3.4	10	150	330	-	465	470	475	140
OSG5DA7ZE3B	Pure Green	PG		-	2.9	3.4	10	750	1560	-	520	525	530	140
OSG8HA7ZE3B	Yellow Green	YG		-	2.1	2.6	10	45	100	-	565	570	575	140
OSY5JA7ZE3B	Yellow	Y		-	2.1	2.6	10	100	220	-	585	590	595	140
OSO5JA7ZE3B	Orange	O		-	2.1	2.6	10	100	220	-	600	605	610	140
OSR5JA7ZE3B	Red	R		-	2.1	2.6	10	100	220	-	620	625	630	140

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of chromaticity coordinate is ±10%

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V