


■ Features

- High Luminous LED
- 5mm Round Standard Directivity
- Long Lifetime Operation
- Superior UV Resistance
- Water Clear Type

■ Applications

- Electronic Signs and Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Outline Dimension

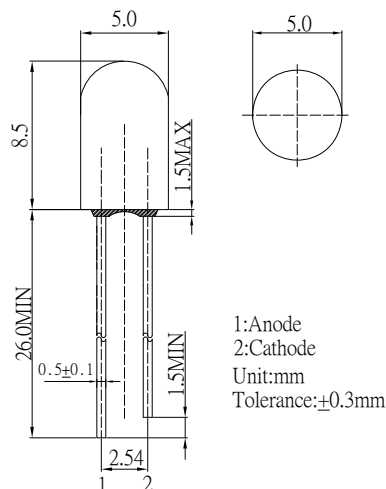


■ Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/BG/PG	YG/Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	108	78	mW
Operating Temperature	T _{opr}	-30 ~ +85		°C
Storage Temperature	T _{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T _{sol}	260°C / 5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■ Directivity

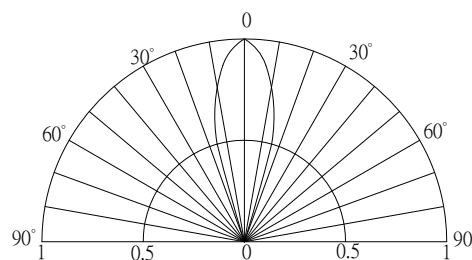

■ Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V _F (V)*			I _R (μA)	I _v (mcd)*			λD (nm)*			θ1/2 (deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V	I _F =20mA			I _F =20mA			
OSW5DK5E31B	White	W		2.8	3.1	3.6	10	10000	12000	-	*CCT: 8500-18000K			30
OSM5DK5E31B	Warm White	M		2.8	3.1	3.6	10	7000	8400	-	*CCT: 2700-3200K			30
OSB5SA5E31B	Blue	B		2.8	3.1	3.6	10	4200	5800	-	465	470	475	30
OSG3DA5E31B	Bluish Green	BG		2.8	3.1	3.6	10	10000	12000	-	500	505	510	30
OSG5DA5E31B	Pure Green	PG		2.8	3.1	3.6	10	10000	12000	-	520	525	530	30
OSY5PA5E31B	Yellow	Y		1.8	2.1	2.6	10	5800	7000	-	585	590	595	30
OSO5PA5E31B	Orange	O		1.8	2.1	2.6	10	5800	7000	-	600	605	610	30
OSR5PA5E31B	Red	R		1.8	2.1	2.6	10	5800	7000	-	620	625	630	30

*1 Tolerance of measurements of dominant wavelength is ±1nm

*2 Tolerance of measurements of CCT is ±10%

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V