

CURRENT REGULATIVE LED


CRLED

- CRLED is LED which supplies constant current to keep LED Intensity Consistency even when power supply voltage fluctuations or load impedance fluctuations occur.
- CRLED is used with current stabilization and current limiting

■Features

- High Luminous Intensity
- UV Resistant Epoxy
- Color Diffused / White Diffused (W,M only)

■Outline Dimension

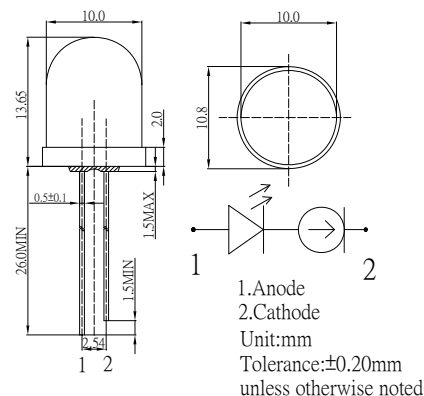


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value	Unit
DC Forward Voltage	V _F	20	V
Power Dissipation	P _D	320	mW
Operating Temperature	T _{opr}	-30 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T _{sol}	260°C/5sec	-

■Directivity

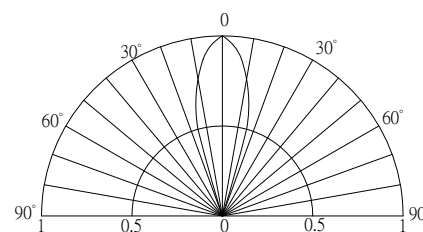

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color	V _F (V)		I _F (mA)			I _R (μA)	I _v (mcd)*			λD(nm)*			2θ1/2(deg)
		Min	Max	Min	Typ.	Max.	Max..	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
		V _F =12V			V _R =8V			V _F =12V			V _F =12V			
OSW5DKA132A-CRLED14	Cool White	5.5	20	-	14	-	10	-	5800	-	CCT: 8500-18000K			30
OSW4DKA132A-CRLED14	Pure White	5.5	20	-	14	-	10	-	5800	-	CCT: 5500-8500K			30
OSM5DKA132A-CRLED14	Warm White	5.5	20	-	14	-	10	-	4200	-	CCT: 2700-3200K			30
OSB5SAA134A-CRLED14	Blue	5.5	20	-	14	-	10	-	3000	-	465	470	475	30
OSG5DAA134A-CRLED14	Pure Green	5.5	20	-	14	-	10	-	5800	-	520	525	530	30
OSY5PAA134A-CRLED14	Yellow	5.0	20	-	14	-	10	-	3000	-	585	590	595	30
OSO5PAA134A-CRLED14	Orange	5.0	20	-	14	-	10	-	3500	-	600	605	610	30
OSR5PAA134A-CRLED14	Red	5.0	20	-	14	-	10	-	3000	-	620	625	630	30

*1 Tolerance of measurements of chromaticity coordinate is ±10%


*2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15%

*4 Tolerance of measurements of forward voltage is ±0.1V


■Applications

- Electronic Signs And Signals/ Small Area Illuminations
- Back Lighting/ Toys/ Other Lighting



■ Typical Applications

1 : Single LED



2 : Multi- LEDs in series

