


■Features

- High Luminous Output
- 10mm Standard Directivity
- Water Clear Type
- Common Cathode Type

■Applications

- Toys
- Games
- Audio
- Other Lighting

■Outline Dimension

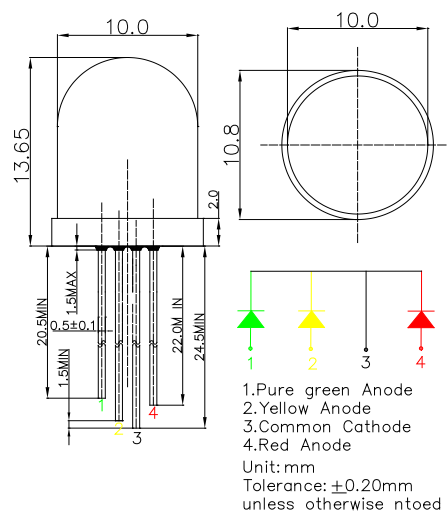


■Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value		Unit
		Red/Yellow	Green	
DC Forward Current	I_F	50	30	mA
Pulse Forward Current#	I_{FP}	120	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	130	108	mW
Operating Temperature	T_{opr}	$-30 \sim +85$		°C
Storage Temperature	T_{stg}	$-40 \sim +100$		°C
Lead Soldering Temperature	T_{sol}	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

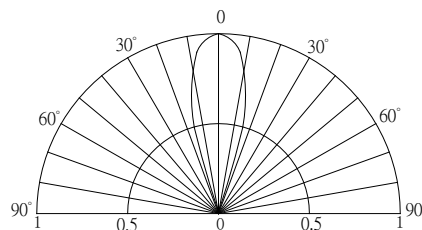

■Electrical -Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F (R/Y)	$I_F=20\text{mA}$	-	2.1	2.6	V
	V_F (G)	$I_F=20\text{mA}$	-	3.1	3.6	V
DC Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	μA
Domi. Wavelength	λ_D (Red)	$I_F=20\text{mA}$	620	625	630	nm
	λ_D (YL)	$I_F=20\text{mA}$	585	590	595	nm
	λ_D (Green)	$I_F=20\text{mA}$	520	525	530	nm
Luminous Intensity	I_v (Red)	$I_F=20\text{mA}$	5800	7000	-	mcd
	I_v (YL)	$I_F=20\text{mA}$	5800	7000	-	mcd
	I_v (Green)	$I_F=20\text{mA}$	8400	10000	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20\text{mA}$	-	30	-	deg

*1 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

*2 Tolerance of measurements of luminous intensity is $\pm 15\%$

*3 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$