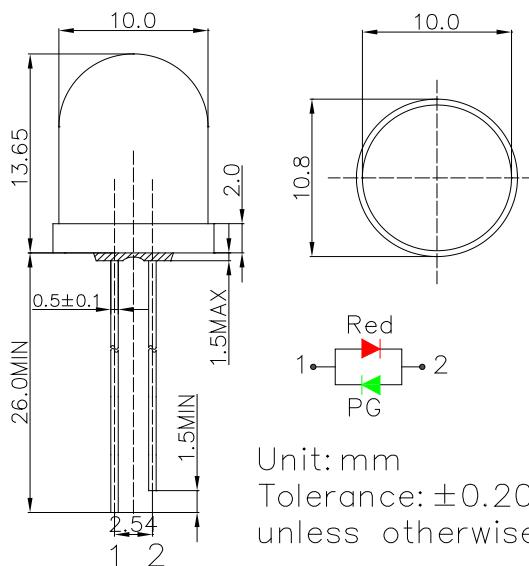


**■Features**

- High Luminous LEDs
- 10mm Round Standard Directivity
- Long Lifetime Operation
- UV Resistant Epoxy
- White Diffused Type
- Bi-polar Type

**■Applications**

- Toys
- Audio
- Games
- Other Lighting

**■Outline Dimension**


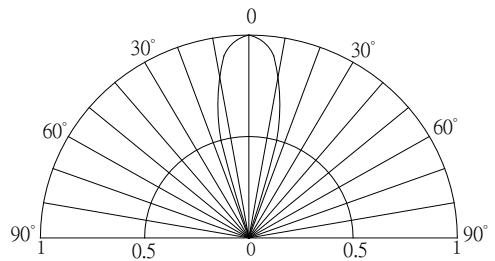
Unit: mm  
 Tolerance:  $\pm 0.20\text{mm}$   
 unless otherwise noted

**■Absolute Maximum Rating**

(Ta=25°C)

Item	Symbol	Value		Unit
		Red	PG	
DC Forward Current	I <sub>F</sub>	50	30	mA
Pulse Forward Current#	I <sub>FP</sub>	100	100	mA
Reverse Voltage	V <sub>R</sub>	5	5	V
Power Dissipation	P <sub>D</sub>	130	102	mW
Operating Temperature	T <sub>opr</sub>	-30~+85		°C
Storage Temperature	T <sub>tsg</sub>	-40~+100		°C
Lead Soldering Temperature	T <sub>sol</sub>	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

**■Directivity**

**■Electrical -Optical Characteristics**

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage* <sub>1</sub>	V <sub>F</sub> (Red)	I <sub>F</sub> =20mA	-	2.1	2.6	V
	V <sub>F</sub> (PG)	I <sub>F</sub> =20mA	-	2.9	3.4	V
DC Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Domi. Wavelength* <sub>2</sub>	λ <sub>D</sub> (Red)	I <sub>F</sub> =20mA	620	625	630	nm
	λ <sub>D</sub> (PG)	I <sub>F</sub> =20mA	520	525	530	nm
Luminous Intensity* <sub>3</sub>	I <sub>v</sub> (Red)	I <sub>F</sub> =20mA	2180	3000	-	mcd
	I <sub>v</sub> (PG)	I <sub>F</sub> =20mA	3000	4200	-	mcd
50% Power Angle	2θ <sub>1/2</sub>	I <sub>F</sub> =20mA	-	30	-	deg

\*<sub>1</sub> Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$

\*<sub>2</sub> Tolerance of measurements of dominant wavelength is  $\pm 1\text{nm}$

\*<sub>3</sub> Tolerance of measurements of luminous intensity is  $\pm 15\%$