


■Features

- High Luminous Intensity
- 2mm Tower Standard Directivity
- Long Lifetime Operation
- Color Diffused (W/M: White Diffused)

■Applications

- General Purpose Indicators
- Decorations
- Toys & Games
- General Use

■Outline Dimension

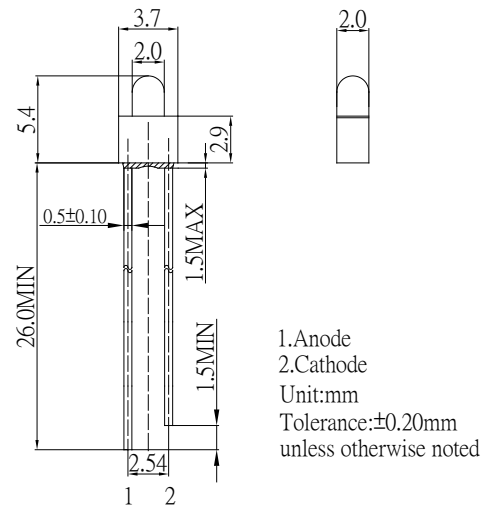


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG	YG/Y/O/R	
DC Forward Current	I _F	30	30	mA
Pulse Forward Current#	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _D	102	78	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

#Pulse width Max 0.1ms, Duty ratio max 1/10

■Directivity

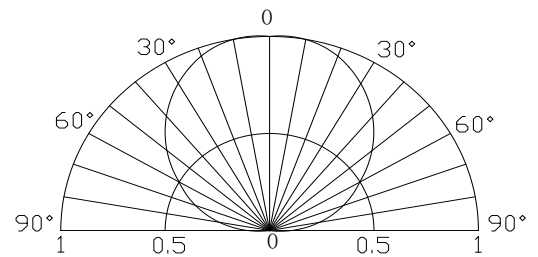

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			V _F (V)*			I _R (μA)	I _v (mcd)*			λD (nm)* / CCT (K)*			2θ1/2 (deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				I _F =20mA			V _R =5V	I _F =20mA			I _F =20mA			
OSW5YK7FC2B	Cool White	W		-	2.9	3.4	10	220	330	-	CCT:8500-18000K			120
OSM5YK7FC2B	Warm White	M		-	2.9	3.4	10	220	330	-	CCT:2700-3200K			120
OSB5YU7FC4B	Blue	B		-	2.9	3.4	10	100	150	-	465	470	475	120
OSG5TA7FC4B	Pure Green	PG		-	2.9	3.4	10	220	330	-	520	525	530	120
OSG8HA7FC4B	Yellow Green	YG		-	2.1	2.6	10	45	68	-	565	570	575	120
OSY5JA7FC4B	Yellow	Y		-	2.1	2.6	10	68	100	-	585	590	595	120
OSO5JA7FC4B	Orange	O		-	2.1	2.6	10	68	100	-	600	605	610	120
OSR5JA7FC4B	Red	R		-	2.1	2.6	10	68	100	-	620	625	630	120
OSR6LU7FC4B	Red	R		-	2.1	2.6	10	30	45	-	630	640	650	120

*1 Tolerance of measurements of chromaticity coordinate/CCT is ±10%

*3 Tolerance of measurements of luminous intensity is ±15%

*2 Tolerance of measurements of dominant wavelength is ±1nm

*4 Tolerance of measurements of forward voltage is ±0.1V