



■Features

- High Luminous LEDs
- 2x5x7mm Rectangular Standard Directivity
- UV Resistant Epoxy
- Water Clear Type
- Bi-polar

■Applications

- Indicate Lamp
- Toys/Games/ Audio
- General Use

■Outline Dimension

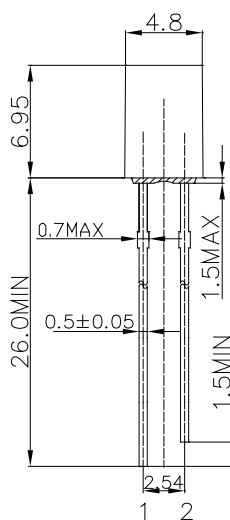

1. Anode
2. Cathode
Unit: mm
Tolerance: ± 0.20 mm
unless otherwise noted


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		Red	White	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	78	102	mW
Operating Temperature	T_{opr}	-30~ +85		°C
Storage Temperature	T_{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T_{sol}	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

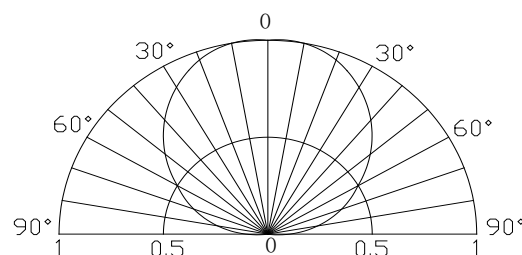

■Electrical -Optical Characteristics

(Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	V_F (Red)	$I_F=20$ mA	-	2.1	2.6	V
	V_F (White)	$I_F=20$ mA	-	2.9	3.4	V
DC Reverse Current	I_R	$V_R=5$ V	-	-	10	μA
Domi. Wavelength*2 / CCT*4	λ_D (Red)	$I_F=20$ mA	620	625	630	nm
	CCT(White)	$I_F=20$ mA	2700	3000	3300	K
Luminous Intensity*3	I_v (Red)	$I_F=20$ mA	500	750	-	mcd
	I_v (White)	$I_F=20$ mA	750	1120	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20$ mA	-	120	-	deg

*1 Tolerance of measurements of forward voltage is ± 0.1 V

*2 Tolerance of measurements of dominant wavelength is ± 1 nm

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$

*4 Tolerance of measurements of color temperature $\pm 10\%$