


■ Features

- High Luminous Intensity
- 3mm Standard Directivity
- UV Resistant Epoxy
- Water Clear Type

■ Applications

- Electronic Signs and Signals
- Small Area Illuminations
- Back Lighting
- Other Lighting

■ Outline Dimension

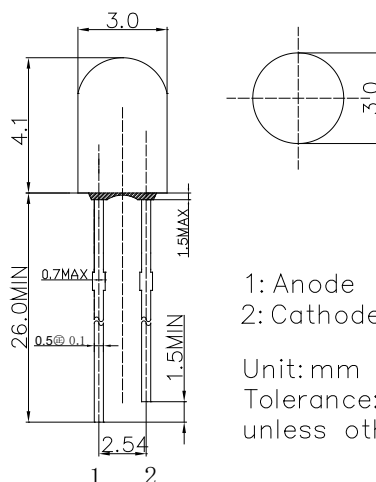

1: Anode
2: Cathode


Unit: mm
Tolerance: $\pm 0.20\text{mm}$
unless otherwise noted

■ Absolute Maximum Rating

($T_a=25^\circ\text{C}$)

Item	Symbol	Value		Unit
		W/M/B/BG/PG	Y/O/R	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	102	78	mW
Operating Temperature	T_{opr}	$-30 \sim +85$		$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$		$^\circ\text{C}$
Lead Soldering Temperature	T_{sol}	$260^\circ\text{C}/5\text{sec}$		-

■ Directivity

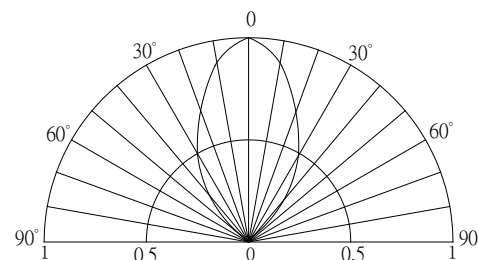

#Pulse width Max.10ms Duty ratio max 1/10

■ Electrical -Optical Characteristics

($T_a=25^\circ\text{C}$)

Part Number	Color			V_F (V)*			I_R (μA)	I_v (mcd)*			λ_D (nm)* / CCT*			$\theta_{1/2}$ (deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				$I_F=20\text{mA}$			$V_R=5\text{V}$	$I_F=20\text{mA}$			$I_F=20\text{mA}$			
OSW5DK3761B	Cool White	W		-	2.9	3.4	10	5800	7000	-	8500-18000K(X:0.27,Y:0.28)			60
OSM5DK3761B	Warm White	M		-	2.9	3.4	10	5800	7000	-	2700-3200K(X:0.45,Y:0.41)			60
OSB5SA3761B	Blue	B		-	2.9	3.4	10	2180	3000	-	465	470	475	60
OSG3DA3761B	Bluish Green	BG		-	2.9	3.4	10	5800	7000	-	500	505	510	60
OSG5DA3761B	Pure Green	PG		-	2.9	3.4	10	5800	7000	-	520	525	530	60
OSY5PA3761B	Yellow	Y		-	2.1	2.6	10	3000	4200	-	585	590	595	60
OSO5PA3761B	Orange	O		-	2.1	2.6	10	3000	4200	-	600	605	610	60
OSR5PA3761B	Red	R		-	2.1	2.6	10	3000	4200	-	620	625	630	60

*1 Tolerance of measurements of chromaticity coordinate/CCT is $\pm 10\%$

*2 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$

*4 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$