


## ■Features

- High Luminous LEDs
- 2x4x5mm Rectangular Standard Directivity
- UV Resistant Epoxy
- White Diffused
- Common Anode Type

## ■Applications

- Toys
- Games
- Audio
- Other Lighting

## ■Outline Dimension

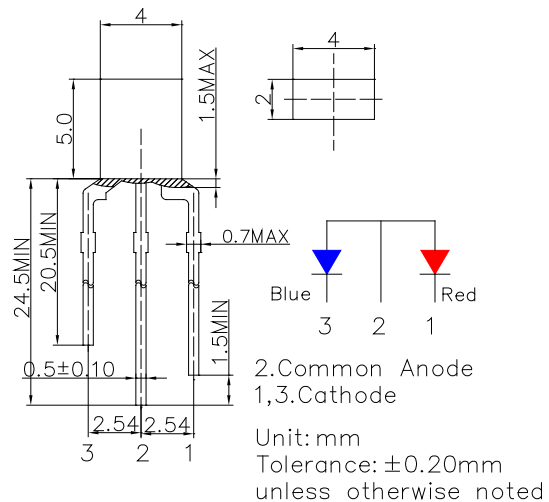


## ■Absolute Maximum Rating

( $T_a=25^\circ\text{C}$ )

| Item                       | Symbol    | Value                           |      | Unit             |
|----------------------------|-----------|---------------------------------|------|------------------|
|                            |           | Red                             | Blue |                  |
| DC Forward Current         | $I_F$     | 30                              | 30   | mA               |
| Pulse Forward Current#     | $I_{FP}$  | 100                             | 100  | mA               |
| Reverse Voltage            | $V_R$     | 5                               | 5    | V                |
| Power Dissipation          | $P_D$     | 78                              | 102  | mW               |
| Operating Temperature      | $T_{opr}$ | $-30 \sim +85$                  |      | $^\circ\text{C}$ |
| Storage Temperature        | $T_{stg}$ | $-40 \sim +100$                 |      | $^\circ\text{C}$ |
| Lead Soldering Temperature | $T_{sol}$ | $260^\circ\text{C}/5\text{sec}$ |      | -                |

#Pulse width Max.10ms Duty ratio max 1/10

## ■Directivity

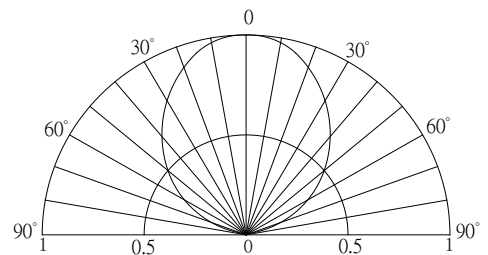

## ■Electrical -Optical Characteristics

( $T_a=25^\circ\text{C}$ )

| Item                 | Symbol             | Condition         | Min. | Typ. | Max. | Unit          |
|----------------------|--------------------|-------------------|------|------|------|---------------|
| DC Forward Voltage*1 | $V_F$ (Red)        | $I_F=20\text{mA}$ | -    | 2.1  | 2.6  | V             |
|                      | $V_F$ (Blue)       | $I_F=20\text{mA}$ | -    | 2.9  | 3.4  | V             |
| DC Reverse Current   | $I_R$              | $V_R=5\text{V}$   | -    | -    | 10   | $\mu\text{A}$ |
| Domi. Wavelength*2   | $\lambda_D$ (Red)  | $I_F=20\text{mA}$ | 620  | 625  | 630  | nm            |
|                      | $\lambda_D$ (Blue) | $I_F=20\text{mA}$ | 465  | 470  | 475  | nm            |
| Luminous Intensity*3 | $I_v$ (Red)        | $I_F=20\text{mA}$ | 330  | 500  | -    | mcd           |
|                      | $I_v$ (Blue)       | $I_F=20\text{mA}$ | 220  | 330  | -    | mcd           |
| 50% Power Angle      | $2\theta_{1/2}$    | $I_F=20\text{mA}$ | -    | 100  | -    | deg           |

\*1 Tolerance of measurements of forward voltage is  $\pm 0.1\text{V}$

\*2 Tolerance of measurements of dominant wavelength is  $\pm 1\text{nm}$

\*3 Tolerance of measurements of luminous intensity is  $\pm 15\%$