


■Features

- High Luminous Intensity
- Low Power Consumption
- UV Resistant Epoxy
- Specified at IF = 1 mA
- White Diffused Type

■Applications

- Background illumination
- Communications equipment
- Low power DC circuits
- General lighting purposes

■Outline Dimension

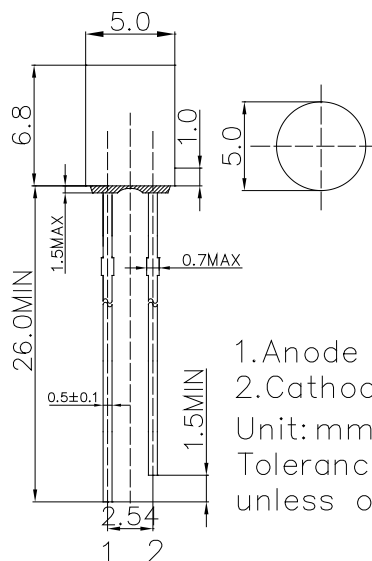


■Absolute Maximum Rating

(Ta=25°C)

Item	Symbol	Value		Unit
		W/M/B/PG	Y/O/R	
DC Forward Current	IF	30	30	mA
Pulse Forward Current#	IFP	100	100	mA
Reverse Voltage	VR	5	5	V
Power Dissipation	PD	102	66	mW
Operating Temperature	Topr	-30 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +100		°C
Lead Soldering Temperature	Tsol	260°C/5sec		-

■Directivity

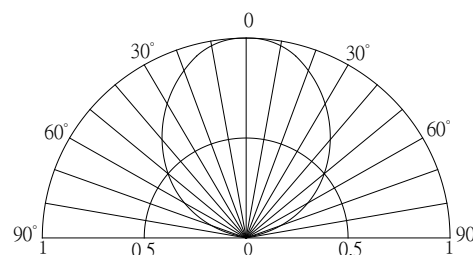

#Pulse width Max.10ms Duty ratio max 1/10

■Electrical -Optical Characteristics

(Ta=25°C)

Part Number	Color			VF (V)			IR(μA)	IV(mcd)			λD(nm)			θ1/2(deg)
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
				IF=1mA			VR=5V	IF=1mA			IF=1mA			
OSW54K5GA2B-1MA	Cool White	W		-	2.8	3.4	10	100	150	-	8500-18000K(X:0.27,Y:0.28)			100
OSW44K5GA2B-1MA	Pure White	W		-	2.8	3.4	10	100	150	-	5500-8500K(X:0.31,Y:0.33)			100
OSM54K5GA2B-1MA	Warm White	M		-	2.8	3.4	10	100	150	-	2700-3200K(X:0.45,Y:0.41)			100
OSB5DA5GA2B-1MA	Blue	B		-	2.8	3.4	10	45	68	-	465	470	475	100
OSG58A5GA2B-1MA	Pure Green	PG		-	2.8	3.4	10	100	150	-	520	525	530	100
OSY5PA5GA2B-1MA	Yellow	Y		-	1.8	2.2	10	68	100	-	585	590	595	100
OSO5PA5GA2B-1MA	Orange	O		-	1.8	2.2	10	68	100	-	600	605	610	100
OSR5PA5GA2B-1MA	Red	R		-	1.8	2.2	10	68	100	-	620	625	630	100

*1 Tolerance of measurements of chromaticity coordinate is ±10% *2 Tolerance of measurements of dominant wavelength is ±1nm

*3 Tolerance of measurements of luminous intensity is ±15% *4 Tolerance of measurements of forward voltage is ±0.1V