OptoSupply
Light It Up

16mm Metal Push-button Switch White LED

OSW16F13-E


▪Description

- Mounting hole size: 16mm
- LED light color: White
- LED type: Bi-directional LED lamp beads (AC/DC)
- Protection level: IP65/IK09
- Switch combination: 1NO/1NC
- Operation type: Self-locking
- Shell material: Nickel plated brass
- Base material: Engineering plastics

▪Product Picture



▪Outline Dimension

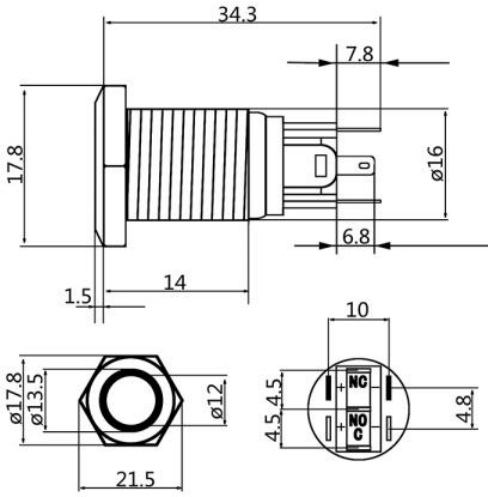

Unit:mm

Tolerance:±0.30mm

▪Applications

- Industrial Automation Equipment
- Vehicle and Transportation Equipment
- Home Appliance and Commercial Equipment

▪Switching Structure Description

Type	Symbol	Schematic Diagram
1NO/1NC		

*Description: Single-point slow-fast switching contact switch with three terminals

▪Absolute Maximum Rating

Item	Value
Rated insulation voltage	AC 250V
Heating current	3A
Rated voltage	DC 12-24V
Resistive load	5A
Inductive load	2A
Contact resistance	≤50mΩ
Insulation resistance	≥1000MΩ
Insulation strength	1000V AC
Operation stroke connected about	0.9mm
Total travel about	2.5mm
Operating temperature	-30 ~ +55℃
Storage temperature	-30 ~ +55℃

▪LED Electrical -Optical Characteristics (Ta=25℃)

V_F (V)			I_F (mA)			Iv(mcd)			CCT(K)			2θ1/2(deg)
						V_F =18V						
Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Typ.
12	18	24	9	15	20	1000	1800	3000	10000	14000	20000	120

LED & Application Technologies

ISO 9001: 2008

ATTENTION
OBSERVE PRECAUTIONS
ELECTROSTATIC
SENSITIVE DEVICES