


■Features

- High Luminous Intensity
- 3mm Round Standard Directivity
- UV Resistant Epoxy
- White Diffused Type
- Comm Anode Type

■Applications

- Toys
- Games
- Audio
- Other Lighting

■Outline Dimension

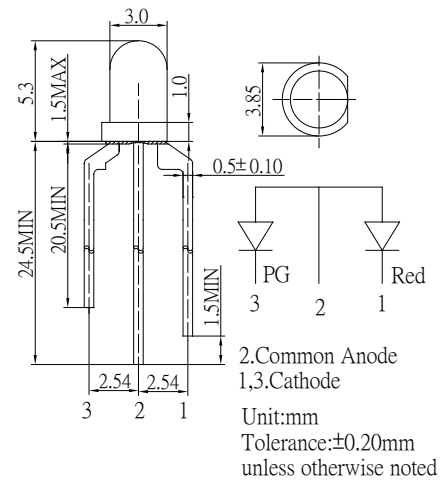


■Absolute Maximum Rating (Ta=25°C)

Item	Symbol	Value		Unit
		Red	PG	
DC Forward Current	I_F	50	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	130	102	mW
Operating Temperature	T_{opr}	-30~ +85		°C
Storage Temperature	T_{stg}	-40 ~ +100		°C
Lead Soldering Temperature	T_{sol}	260°C/5sec		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

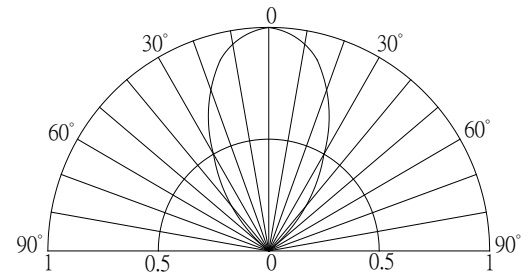

■Electrical -Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage	V_F (Red)	$I_F=20mA$	-	2.1	2.6	V
DC Forward Voltage	V_F (PG)	$I_F=20mA$	-	2.9	3.4	V
DC Reverse Current	I_R	$V_R=5V$	-	-	10	μA
Domi. Wavelength*	λ_D (Red)	$I_F=20mA$	620	625	630	nm
	λ_D (PG)	$I_F=20mA$	520	525	530	nm
Luminous Intensity*	I_v (Red)	$I_F=20mA$	1120	1560	-	mcd
	I_v (PG)	$I_F=20mA$	1560	2180	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20mA$	-	60	-	deg

*1 Tolerance of measurements of dominant wavelength is $\pm 1nm$

*2 Tolerance of measurements of luminous intensity is $\pm 15\%$

*3 Tolerance of measurements of forward voltage is $\pm 0.1V$

LED & Application Technologies

