


■Features

- 0.23mm enameled copper wire, length 250±5mm
- High Luminous Intensity
- 5mm Round Standard Directivity
- White Diffused Type
- Common Anode Type

■Applications

- Electronic toys, electronic appliances, electronic models
- Models lightning and indicator light

■Outline Dimension

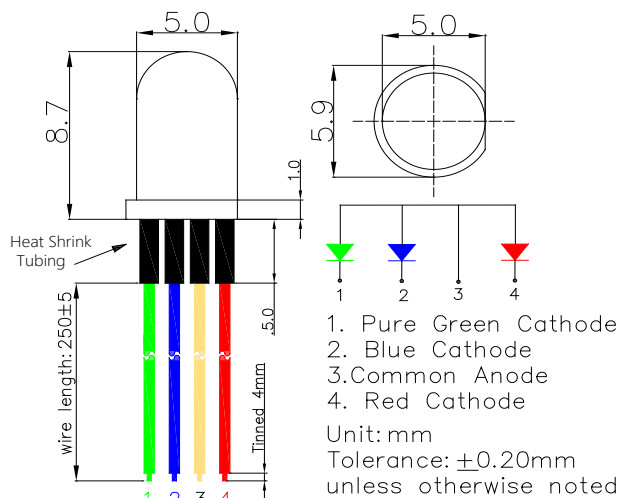


■Absolute Maximum Rating

($T_a=25^\circ\text{C}$)

Item	Symbol	Value		Unit
		Red	Blue/Green	
DC Forward Current	I_F	30	30	mA
Pulse Forward Current#	I_{FP}	100	100	mA
Reverse Voltage	V_R	5	5	V
Power Dissipation	P_D	78	102	mW
Operating Temperature	T_{opr}	$-30 \sim +85$		$^\circ\text{C}$
Storage Temperature	T_{stg}	$-40 \sim +100$		$^\circ\text{C}$
Lead Soldering Temperature	T_{sol}	$260^\circ\text{C}/5\text{sec}$		-

#Pulse width Max.10ms Duty ratio max 1/10

■Directivity

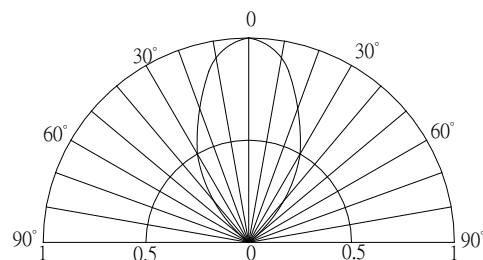

■Electrical -Optical Characteristics

($T_a=25^\circ\text{C}$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
DC Forward Voltage*1	$V_F(R)$	$I_F=20\text{mA}$	-	2.1	2.6	V
	$V_F(B/G)$	$I_F=20\text{mA}$	-	2.9	3.4	V
DC Reverse Current	I_R	$V_R=5\text{V}$	-	-	10	μA
Domi. Wavelength*2	$\lambda_D(\text{Red})$	$I_F=20\text{mA}$	620	625	630	nm
	$\lambda_D(\text{Green})$	$I_F=20\text{mA}$	520	525	530	nm
	$\lambda_D(\text{Blue})$	$I_F=20\text{mA}$	465	470	475	nm
Luminous Intensity*3	$I_v(\text{Red})$	$I_F=20\text{mA}$	-	750	-	mcd
	$I_v(\text{Green})$	$I_F=20\text{mA}$	-	1560	-	mcd
	$I_v(\text{Blue})$	$I_F=20\text{mA}$	-	500	-	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F=20\text{mA}$	-	60	-	deg

*1 Tolerance of measurements of forward voltage is $\pm 0.1\text{V}$

*2 Tolerance of measurements of dominant wavelength is $\pm 1\text{nm}$

*3 Tolerance of measurements of luminous intensity is $\pm 15\%$